




Safti-Seal Benefits

- Seat/Seal to Substrate "gasket" Protection
- No Adhesive, Cohesive, or Substrate Failure
- Level III Dynamic Cycle (seismic) Rated
- Seal Flanking Paths Around Assembly
- Dampened Sound & Vibration Transfer
- Exposed Head of Wall and Deflection Gaps
- Lifetime Seal - No Joint Material Fatigue


Reports (ASTM E90-09) available upon request
www.saftiseal.com

Safti-Seal Tested Wall Assemblies


- 1/2" to 3/4" Exposed Deflection Gaps
- 5/8" Type X Gypsum Sheathing
- 3 1/2" Fiberglass Insulation Cavity Fill

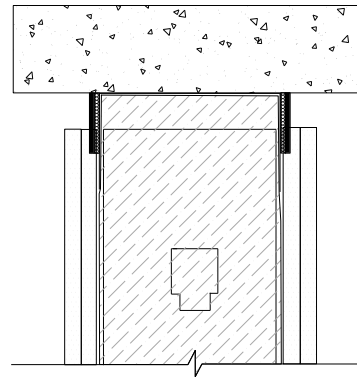


STC - 51
 Single Wall Unbalanced - (TL 17-289)




STC - 55
 Single Wall Balanced - (TL 17-288)

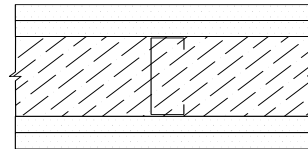

STC - 63
 Chase Wall Unbalanced - (TL 17-293)

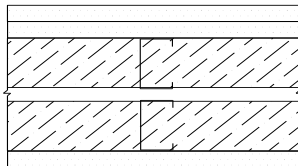

STC - 64
 Chase Wall Balanced - (TL 17-292)

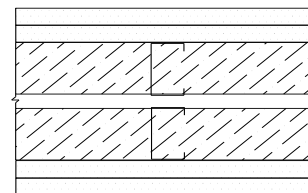

Reports available upon request
www.saftiseal.com