




### Safti-Seal Gasket Benefits

- Seat/Seal to Substrate "gasket" Protection
  - No Adhesive, Cohesive, or Substrate Failure
  - Level III Dynamic Cycle (seismic) Rated
  - Seal Flanking Paths Around Assembly
  - Dampened Sound & Vibration Transfer
  - Exposed Head of Wall and Deflection Gaps
  - Lifetime Seal - No Joint Material Fatigue
- Reports (ASTM E90-09) Click Report Number


### Safti-Seal Tested Wall Assemblies

- 1/2" to 3/4" Exposed Deflection Gaps
- 5/8" Type X Gypsum Sheathing
- 3 1/2" Fiberglass Insulation Cavity Fill




#### **STC - 51**

Single Wall Unbalanced - ([TL 17-289](#))




#### **STC - 55**

Single Wall Balanced - ([TL 17-288](#))




#### **STC - 63**

Chase Wall Unbalanced - ([TL 17-293](#))




#### **STC - 64**

Chase Wall Unbalanced - ([TL 17-292](#))



#### **STC - 64**

Flute Guard Perpendicular - ([TL 19-113](#))

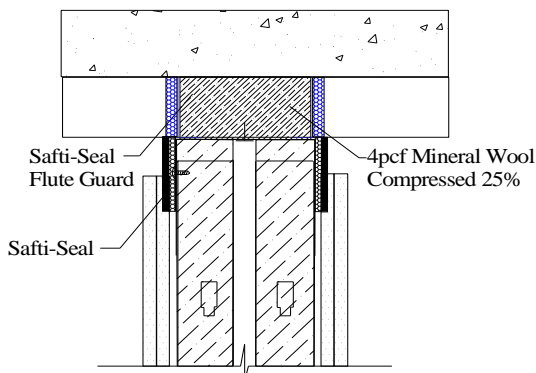

#### **STC - 54**

Resilient Channel Assembly - ([TL 19-184](#))

