





Sound Tested in Accordance
with ASTM E90-09

(Field) Peel & Stick

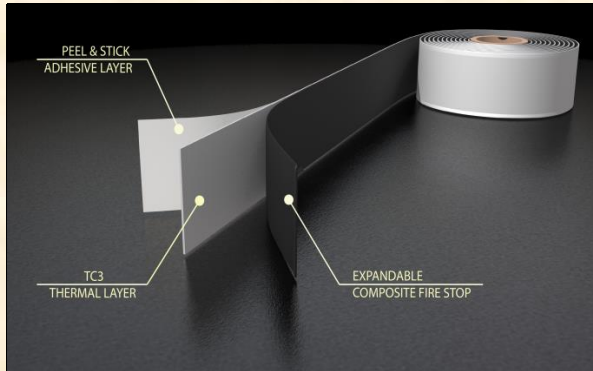

Factory Applied

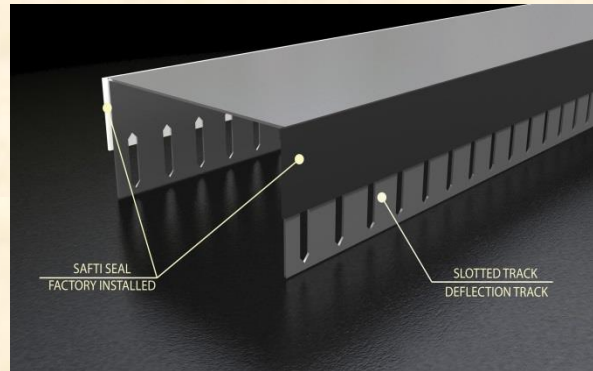

- Permanent Dynamic Joint Protection - Before MEP, Stud & Drywall
- Up to 2.00" Deflection - 100% Unencumbered Smallest Installed Gaps
- Single Composite Profile - Rated for Both **1 & 2 Hour** Assemblies
- Lifetime **Fire, Smoke, & Sound Protection - No Material Fatigue**
- Improve "Top Track" & "Backing Repair" Production
- **No** Additional "Post Drywall Joint Fill" Material Requirements
- Exposed (Optional) Reveal or Hidden Rating of Cosmetic Tape/Trims
 - **UL 2079: Certified with Level III (Seismic) Deflection Rating**
 - **ASTM E-90: Certified to Exposed Joint Protection (STC 64)**
 - **Temperature: Storage & Application: 10 - 150 °F**



U.S. Patent #10,626,598

www.saftiseal.com



Sound Tested in Accordance
with ASTM E90-09

Exposed “Skim Coat” Substrate



Exposed “Raw Concrete” Substrate

