




Sound Tested in Accordance
with ASTM E90-09

Fluted Deck Void Joint Protection – "Pre-Drywall" Options


Compression Fit – "Safti-Seal ODP" or Mineral Wool Cut 25% Oversize Dimensions

- 1) Compress Mineral Wool 25%, Insert, & Fill Flute Void - (Width of Track)
- 2) **No** Caulk/Spray Coating or "Joint Fill" Required (UL Listing - [HW-D-0900](#))

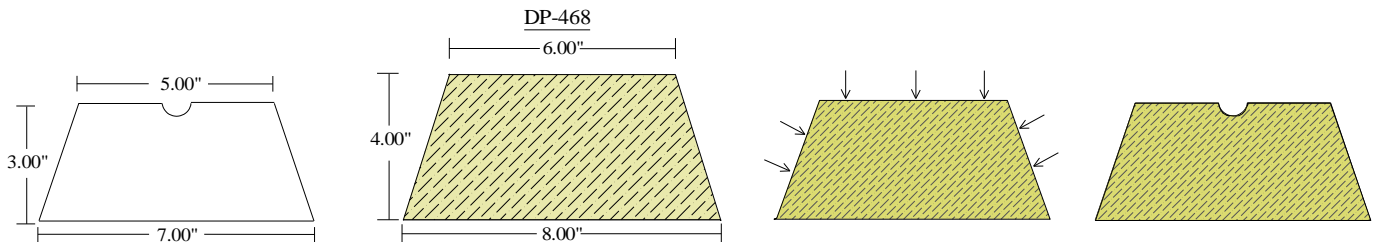

Alternate: Compression Fit – "Safti-Seal DPW" - Seal Wrapped Plug

- 1) Compress and Insert Plug Both sides of Wall Assembly
- 2) **No** Caulk/Spray Coating or "Joint Fill" Required (UL Listing - [HW-D-0900](#))

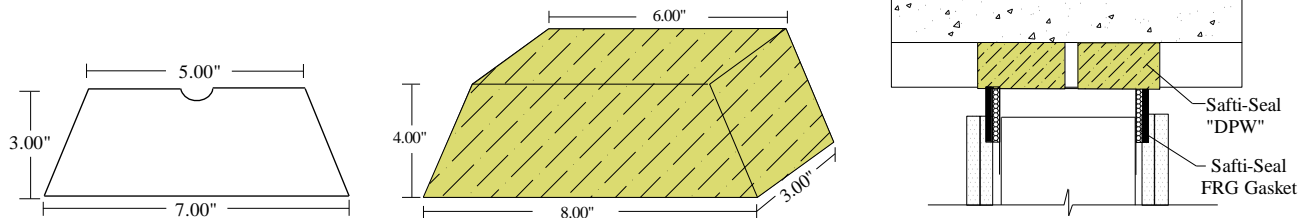

Shaft Wall Joint Protection – Dynamic Head of Wall Deflection

- 1) Compress and Insert Cavity Plug into Head of Wall Track
- 2) **No** Caulk/Spray Coating or "Joint Fill" Required (UL Listing - [HW-D-0889](#))

