




STC Rated (ASTM E90-09)

Fluted Deck/Safti-Seal Joint Protection – "Pre-Drywall" Options


Oversize Plug - *Safti-Seal Plug* or *Batt Mineral Wool Cut to 25% Oversize Dimensions*

- 1) Compress Mineral Wool 25%, Insert, & Fill Flute Void - (overlap *Safti-Strip*)
- 2) **No Caulk/Spray Coating or "Joint Fill" Required** (UL Listing - [HW-D-0513](#))

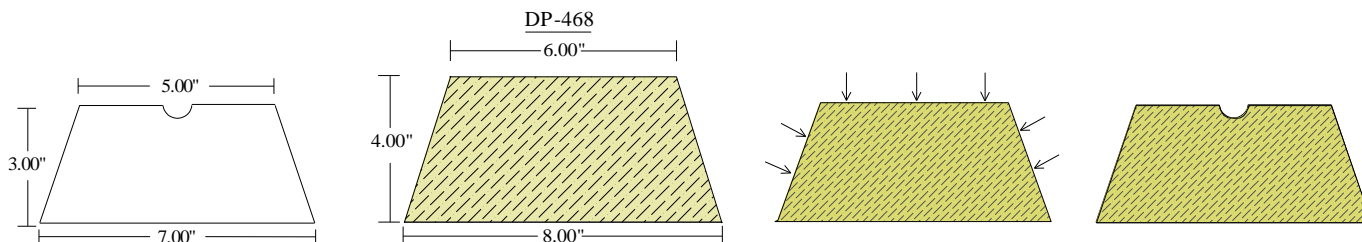

Friction Fit "Same Size" Plug - *Top Stop, Fire, Delta Deck, Speed Plug, Etc...*

- 1) Friction Fit ("loose" no compression) Fill Flute Void - (*Width of Track*)
- 2) Coat Entire Plug Overlapping 1/2" onto Deck Surfaces - (*No "Joint Fill"*)
seal leakage & hose stream "blowout" failure (UL Listing - [HW-D-0513](#))

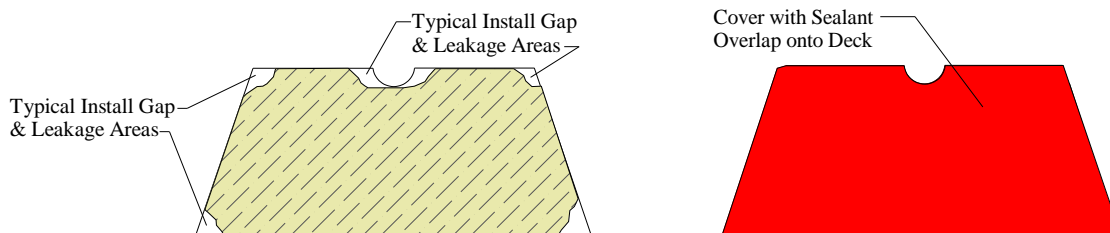

Alternate: **No Spray Option** - "Same Size" Plug - *Safti-Strip* or *Safti-Frame* as Joint Seal (*Plug Install Width of Track – No "Joint Fill" Required*)

- 1) Apply 1/4" Bead of Any UL Listed Caulk to Top Three Sides of Plug
- 2) Install & Smear Excess (one side only) to Seal Gaps - (UL Listing - [HW-D-0513](#))

