



Sound Tested in Accordance  
with ASTM E90-09

## Fire, Smoke, & Sound Rating – Zinc or Vinyl Control & Mullion Joints

### CJG (Control Joint Gasket) & FRG (Fire Rated Gasket)


**Eliminate** Drywall Rips, Mineral Wool, & Sealant Required for STC, Fire, Air/Smoke Leakage

Install Before Drywall for Unobstructed Inspection & Verification of Joint Seal


Lifetime Rating - for “Off the Shelf” Zinc or Vinyl 093 Trim Profiles

	Safti-Seal Gasket	“093”	“093X”
UL Listed Vertical Certification	Yes - (CJG)	No	Yes
UL Listed Horizontal Certification	Yes - (FRG)	No	No
UL Certified Air/Smoke Leakage	Yes	No	No
STC Rating	Yes	No	???

### Vertical Application – UL Listing [WW-D-0257](#)

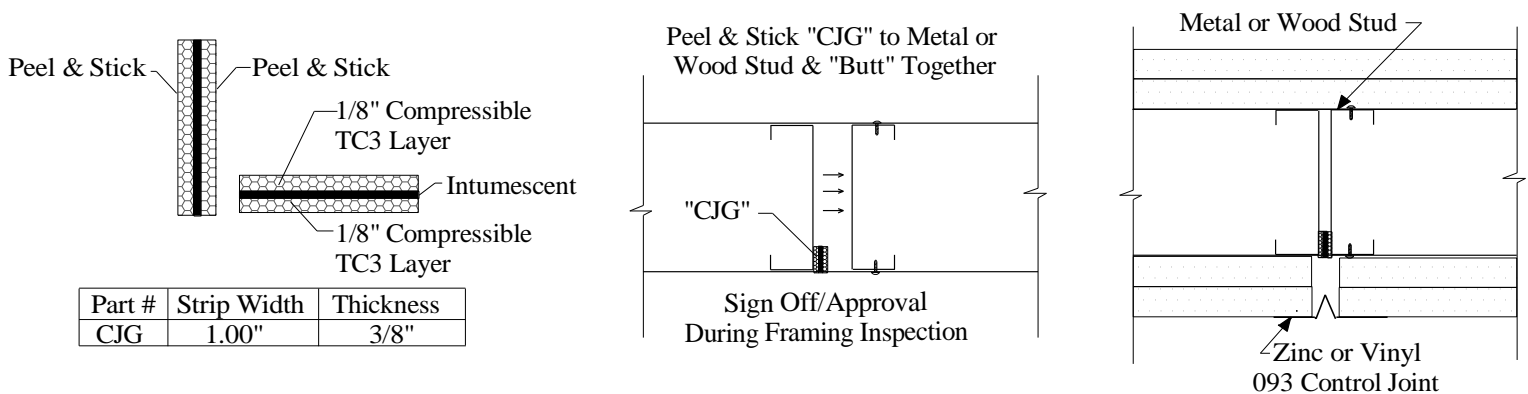

### Horizontal Application – UL Listing [HW-D-0893](#) & [WFCi Report #12142](#)

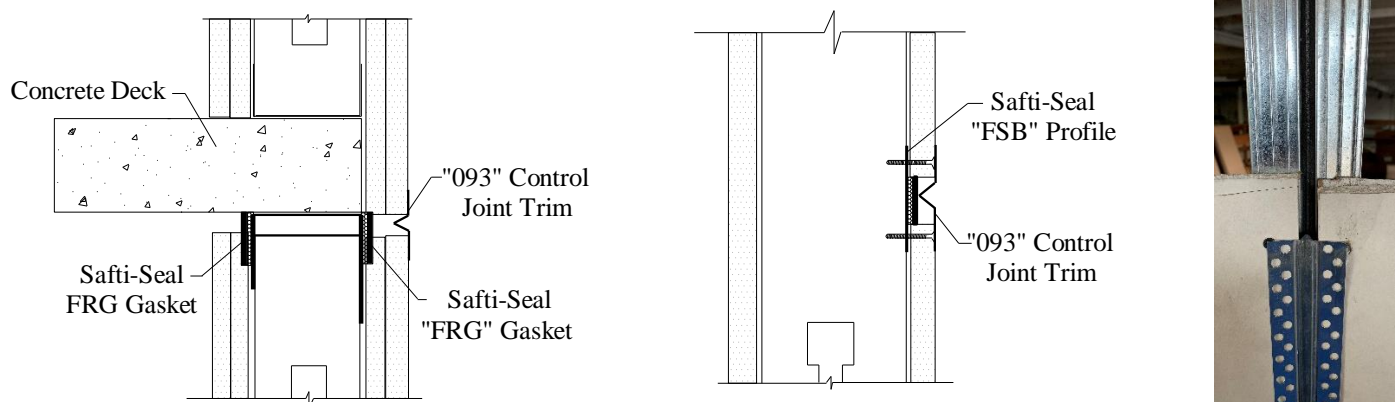




Sound Tested in Accordance  
with ASTM E90-09

## Product Profile Dimensions – Submittal

### PS3 - “CJG” Continuation & Control Joint Gasket - Wall to Wall Joints

Composite TC3 Outer Layers over Intumescent Fire Stop with permanent “peel and stick” adhesive on outer layers for Wall to Wall Continuation and Seal/Fire Rate behind Architectural Design Joints (optional control joint over gap) for up to 2-hr rated assemblies. Tested and certified to UL 2079 v.5 Standards [WW-D-0257](#). Profile sections are certified for use located inside 1/4” gap between opposing metal or wool stud framing.

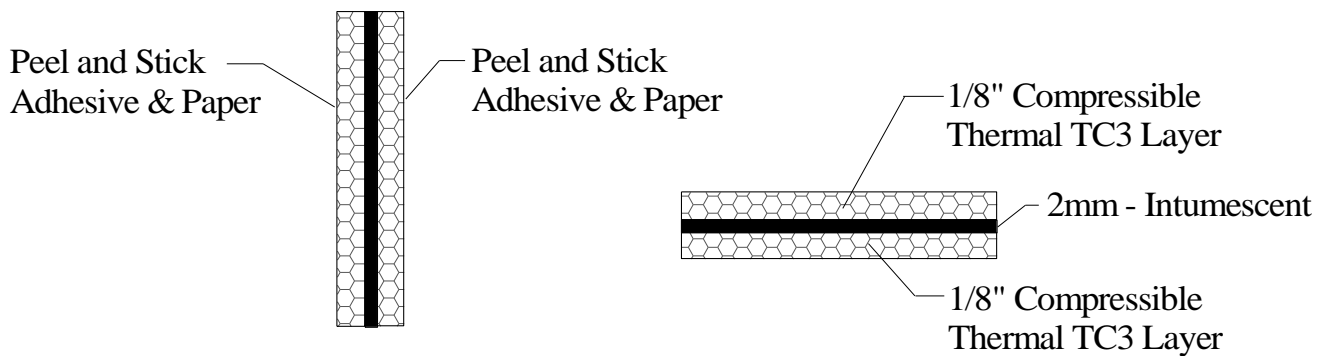

Part #	Strip Width	Strip Thickness
CJG	1.00"	3/8"

#### UL, ASTM & Code Standards

ASTM E-119, UL263, E814  
A1003, A653, A924, C645, C754, C955  
2015 & 2018 IBC

#### Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
MR 5.1 & 5.2 - Regional Proximity  
EQ 4.1 - Low Emitting Materials  
EQ 9 - Enhanced Acoustical