



Sound Tested in Accordance  
with ASTM E90-09


## Smoke & Sound Rating – Zinc or Vinyl Control & Mullion Joints

### CJSG (Control Joint Smoke & Sound Gasket)


**Eliminate** Drywall Rips, Mineral Wool, & Sealant Required for STC, Air/Smoke Leakage

Install Before Drywall for **Unobstructed Inspection & Verification of Joint Seal**

Lifetime Rating - for “Off the Shelf” Zinc or Vinyl 093 Trim Profiles

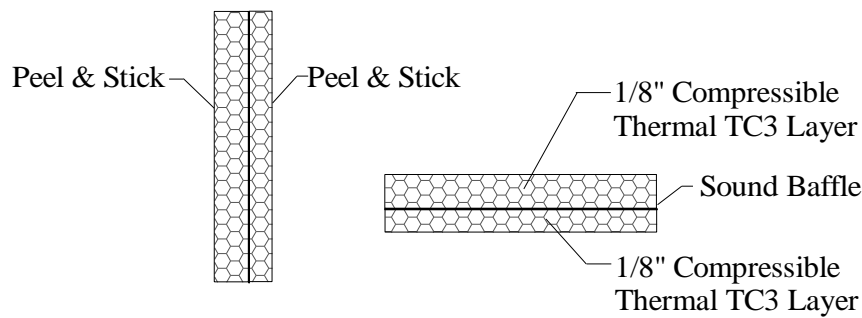

| Part # | Strip Width | Strip Thickness |
|--------|-------------|-----------------|
| CJSG   | 1.00"       | 3/8"            |

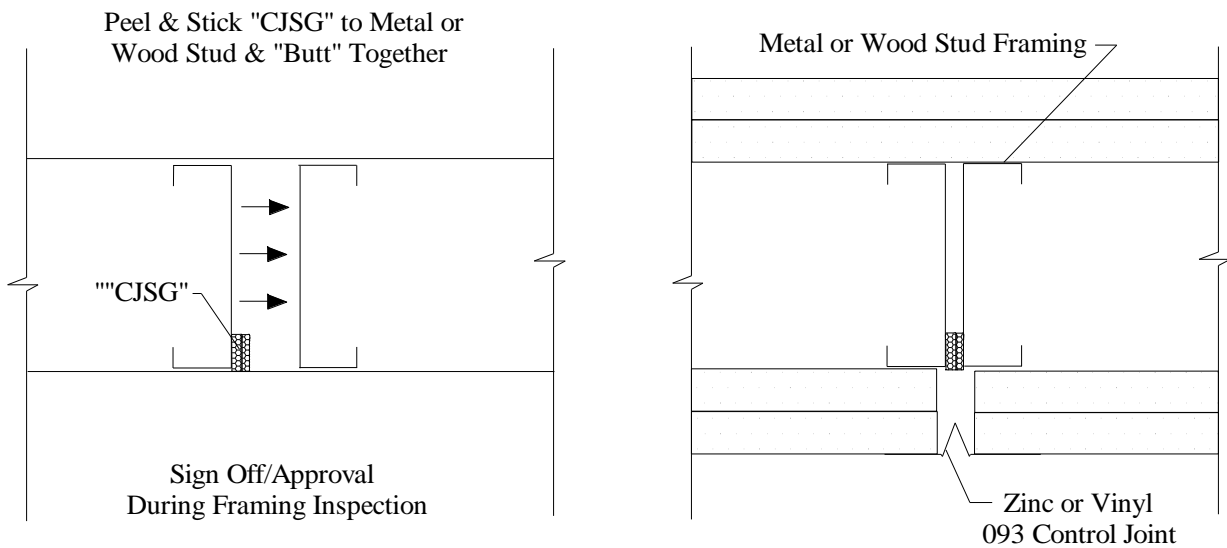




Sound Tested in Accordance  
with ASTM E90-09

## Product Profile Dimensions – Submittal

### PS41 - “CJSG” Continuation & Control Joint Gasket - Wall to Wall Joints

Composite TC3 Outer Layers over Sound Baffle with permanent “peel and stick” adhesive on outer layers for Wall-to-Wall Continuation and Seal/Fire Rate behind Architectural Design Joints (optional control joint over gap) for up to 2-hr rated assemblies. Profile sections are certified for use located inside 1/4” gap between opposing metal or wool stud framing.

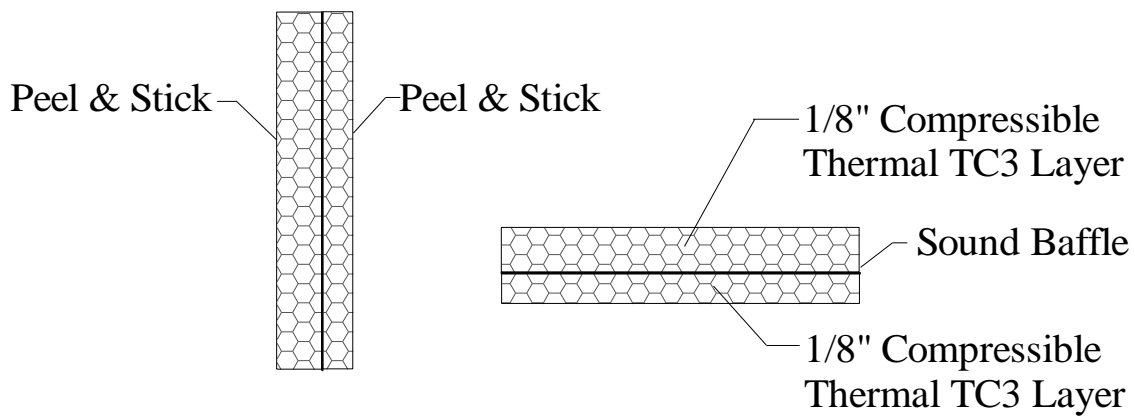

| Part # | Strip Width | Strip Thickness |
|--------|-------------|-----------------|
| CJSG   | 1.00"       | 3/8"            |

#### UL, ASTM & Code Standards

ASTM E-119, UL263, E814  
A1003, A653, A924, C645, C754, C955  
2015 & 2018 IBC

#### Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
MR 5.1 & 5.2 - Regional Proximity  
EQ 4.1 - Low Emitting Materials  
EQ 9 - Enhanced Acoustical