




Sound Tested in Accordance
with ASTM E90-09

Fire Rated Gasket – “FRG” Flex Lock Edge Joint Protection

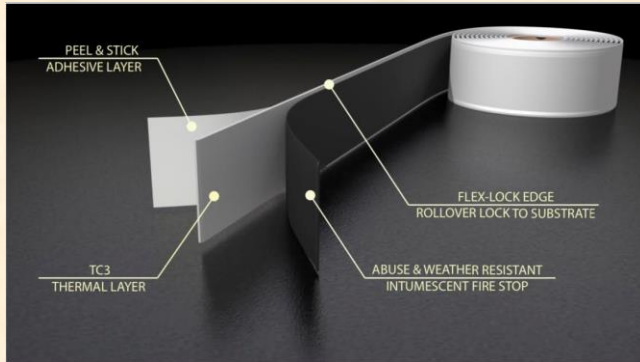

Profile	Gasket Width	Install Gap	Deflection
FRG-50	0.75”	1/4”	1/2”
FRG-75	1.00”	3/8”	3/4”
FRG-100	1.25”	1/2”	1”
FRG-150	1.50”	3/4”	1.50”
FRG-200	2.25”	1”	2.00”

- “Peel & Stick” Gasket “Wrap Around” Seal - Before MEP, Stud & Drywall
- Up to 2.00” Deflection - 100% Unencumbered Smallest Install Gaps
- Single Composite Profile - Rated for Both 1 & 2-Hour Assemblies
- Lifetime Fire, Smoke, & Sound Protection - No Material Fatigue
- Improve “Top Track” Install & “Backing Repair” Production
- No Additional “Post Drywall Joint Fill” Material Requirements
- Exposed (Optional) Reveal or Hidden Rating of Cosmetic Tape/Trims
 - UL 2079: Certified with Level III (Seismic) Deflection Rating
 - ASTM E-90: Certified to Exposed Joint Protection (STC 64)
 - Temperature: Storage & Application: 10 - 150 °F



U.S. Patent #10,626,598



Sound Tested in Accordance
with ASTM E90-09

Exposed “Skim Coat” Substrate



Exposed “Raw Concrete” Substrate

