



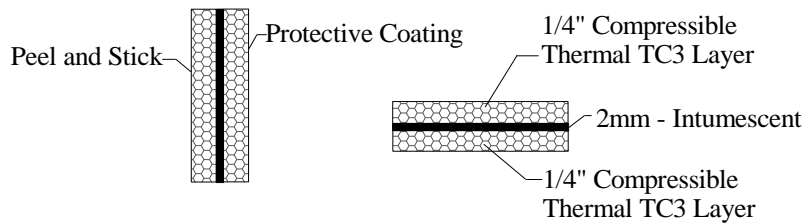

## Resilient Channel Gasket – “RCG”

- “Peel & Stick” Resilient Channel Gasket - Install Before Stud & Drywall
- Seal RC Buildup or “Chimney Gap” in Rated Dynamic & Static Partitions
- 100% Unencumbered Movement up to 3/4” Overall Deflection Capability
- Third Party STC (ASTM E-90) & Fire/Smoke (UL 2079 v.5) - [HW-D-0890](#)
  - Temp: Storage & Application: - 10 to 150 °F

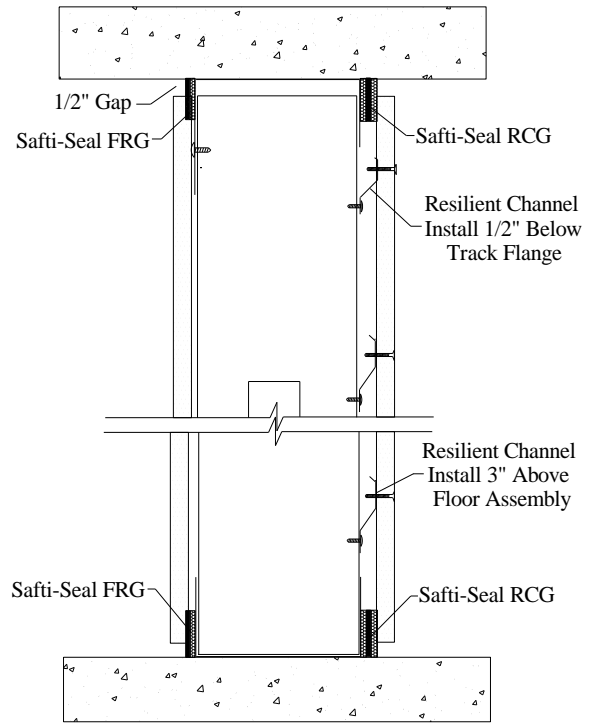

Product	Box Size	Strip Width	Length	Pcs/Box	Lft/Box
RCG-75-4	4 x 4 x 48"	1.00"	4'	28	112
RCG-75-6	6 x 6 x 48"	1.00"	4'	60	240
RCG-75-10	10 x 10 x 48"	1.00"	4'	170	680




## Product Profile Dimensions – Submittal

### PS37 - “RCG” Resilient Channel Gasket – “Peel & Stick” Roll

Rated Resilient Channel Gasket with Pressure Sensitive Adhesive for “Peel and Stick” application. Seal Resilient Channel Buildup or “Chimney Gap” in both Dynamic and Static Fire, Smoke, & Sound rated conditions

- ASTM E-90 – Maintain up to STC 56
- UL 2079 v.5 – 1 Hour Fire Rating
- Temp: Storage & Application - 10 to 150 °F

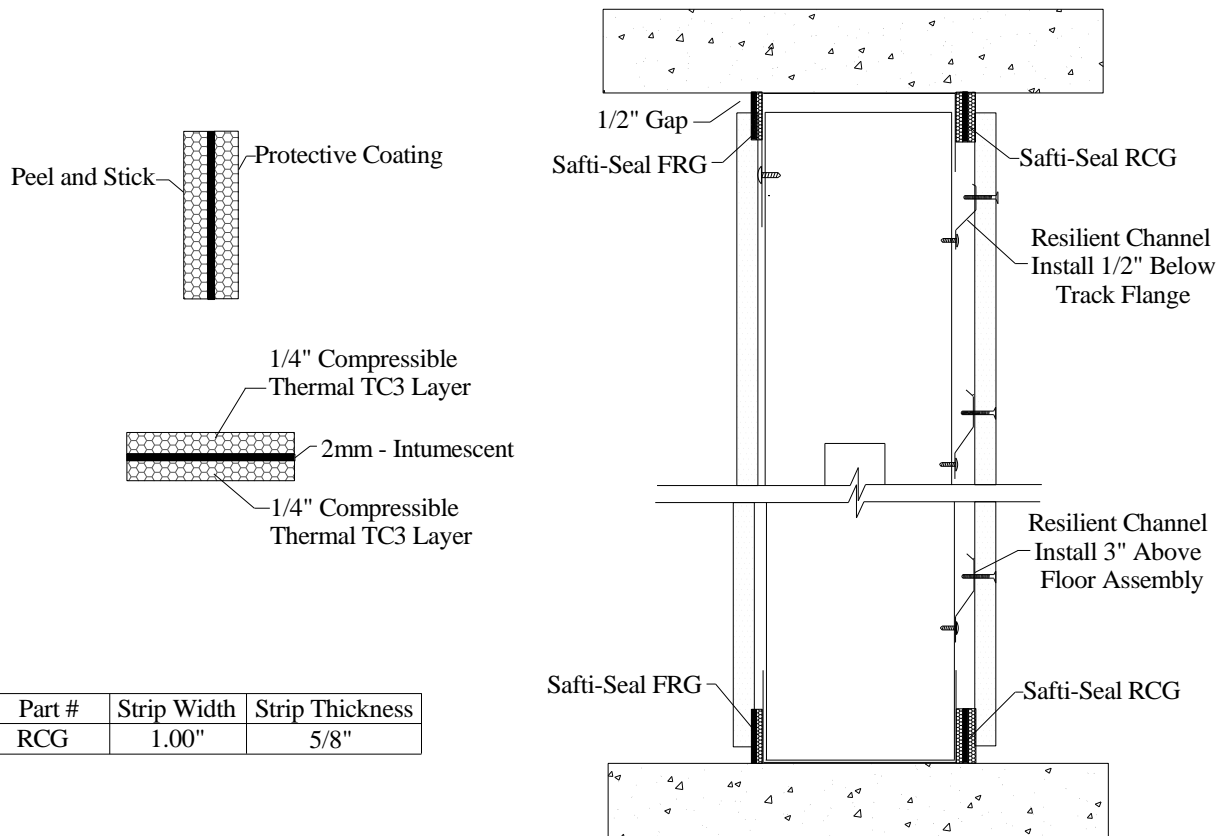

Part #	Strip Width	Strip Thickness
RCG	1.00"	5/8"

Product	Box Size	Strip Width	Length	Pcs/Box	Lft/Box	Install Gap	Max Deflection
RCG-75-4	4 x 4 x 48"	1.00"	4'	28	112	0.375"	0.75"
RCG-75-6	6 x 6 x 48"	1.00"	4'	60	240	.0375"	075"
RCG-75-10	10 x10 x48"	1.00"	4'	170	680	.0375"	0.75"