



Solid Continuous Angle Backer (SCAB) Solutions


- Required Backing of “Cut Out Track Flanges” – Cavity Obstructions
- Code Compliant Seal of “Static” Penetrations through Dynamic Joint Zones
- Friction Fit Install “**Certified & Rated**” Continuous Support of Joint Protection
 - UL Certification Listing - [HW-D-0890](#)

SCAB


Continuous Backing of Fire, Smoke, and Sound Joint Protection

“Snip Slot” Flange to Accommodate Off-Center Obstructions


Reversible for Covering Core Drills Outside Cavity

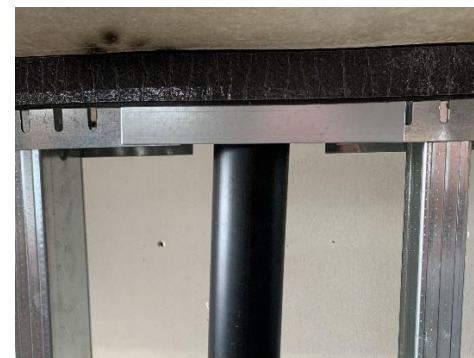

Obstruction Inside Cavity

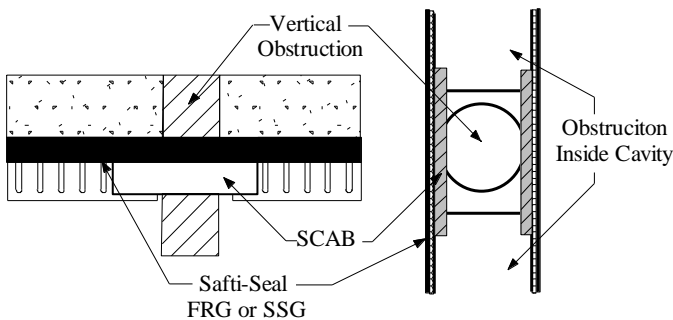


Obstruction Outside Cavity

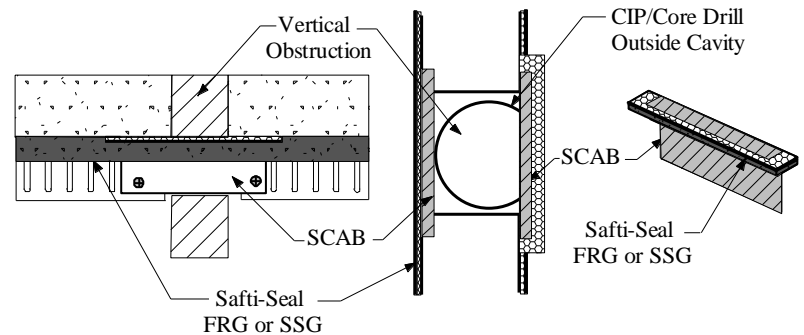



SCAB – IC (Intumescent Collar)

Backing with Intumescent Collar for **CPVC & PVC** penetrations
Complete before Stud & Drywall with Level III (seismic) 100% Movement Capability

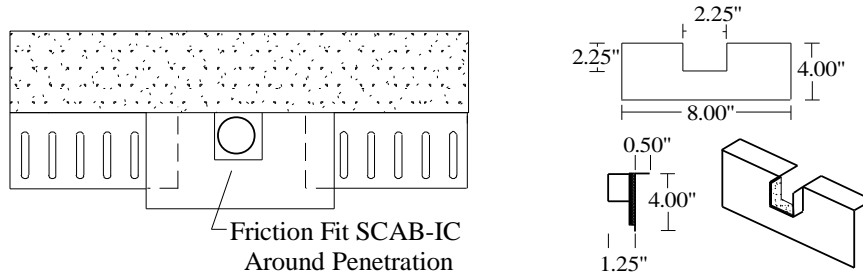

SCAB – MC (Metal Conduit)

Backing with Sealant Support inside Cavity for **Metal Conduit** penetrations
Complete before Stud & Drywall with Level III (seismic) 100% Movement Capability

