




## Slotted Continuous Angle Backing "SCAB" – Cutout Flange Repair


### Vertical or Cavity Obstruction – Continuous Flange Repair

Vertical "cavity obstruction" such as pipe, conduit, cable, etc... penetrating floor assembly and located inside wall cavity. Install steel continuous angle backing (SCAB) to maintain code certified backing of smoke, sound, & fire rated joint protection.

- 1) Terminate Ceiling Runner or Track flanges a max 2" shorter than SCAB profile to allow for min 1.00" overlap of SCAB onto track profiles (each side)

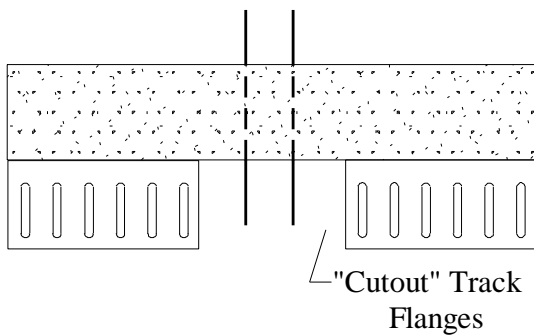

- 2) Install Safti-Seal SCAB friction fit 1/2" horizontal leg of SCAB between ceiling runner and overhead overlapping runner flanges a min 1.00" (each end)

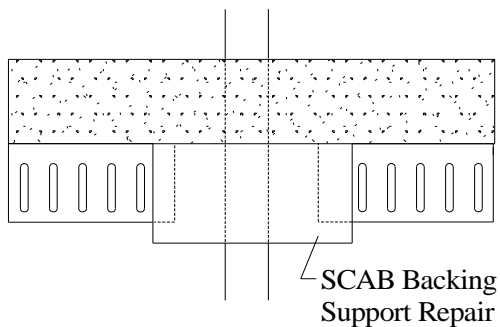

- 3) Install FRG, RCG, or SSG gasket joint protection continuous over SCAB

