


Product Profile Dimensions



Sound Tested in Accordance
with ASTM E90-09

PS19 – “SCAB” - Slotted Continuous Angle Backer

Slotted Continuous Angle Backer profile to span/repair gaps or cutouts in framed track flanges and or seal vertical CIP or core drilled holes in substrate above at vertical obstructions. Provides code required backing of joint materials with “snip away slot” allowing removal of horizontal flange when obstruction is next to flange. Up to 2 hour rated wall assemblies for up to 2” overall movement level III (seismic) joint protection. Horizontal 1/2” flange is friction fit between substrate and assembly track framing or facing away when used to seal CIP or Core Drilled holes.

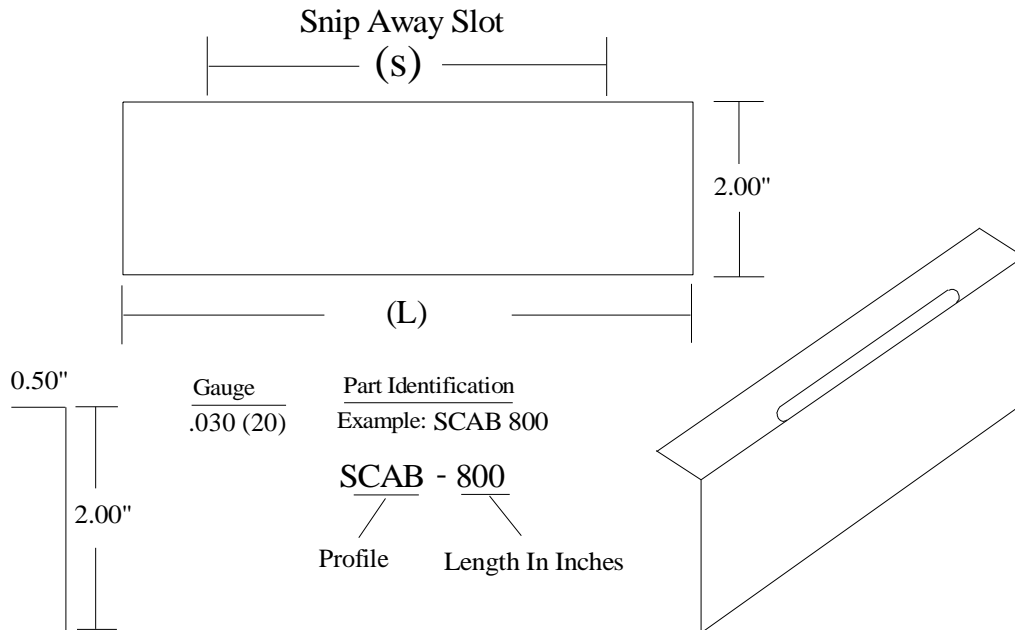

Profile	Length (L)	Gauge (G)	Snip Away Slot (S)
SCAB 800	8.00"	20	5.25"
SCAB 1200	12.00"	20	5.25"
SCAB 1600	16.00"	20	5.25"

ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
ASTM E814, E1966, E2837
A1003, A653, A924, C645, C754, C955
Sound Tested according to ASTM E90-09
2015 & 2018 IBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
MR 4.1 & 4.2 - Recycled Content: up to 2 pts
MR 5.1 & 5.2 - Regional Proximity
EQ 4.1 - Low Emitting Materials
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300

www.saftiseal.com