

Product Profile Dimensions




Sound Tested in Accordance
with ASTM E90-09

PS2 - "SSG" Smoke & Sound Gasket Seal – "Peel & Stick" Roll

Smoke & Sound Seal Gasket - with Air, Water, & Abuse Resistant Coating. Pressure Sensitive Adhesive for "Peel and Stick" application. Material acceptable for use with non-solvent based paint, caulk, sprays, and zinc or vinyl drywall trims. Third party certified for both dynamic and static joint conditions.

- ASTM E-90: Reports TL19-103 & 113 (**64 STC rated**)
- ASTM E-84: *Flame Spread: 0* & *Smoke Development: 0*
- UL 2079 v.5: Level III (Seismic) Cyclical Standard
- Temp: *Storage & Application - 10 to 150 °F* *Resistance - 10 to 425 °F*

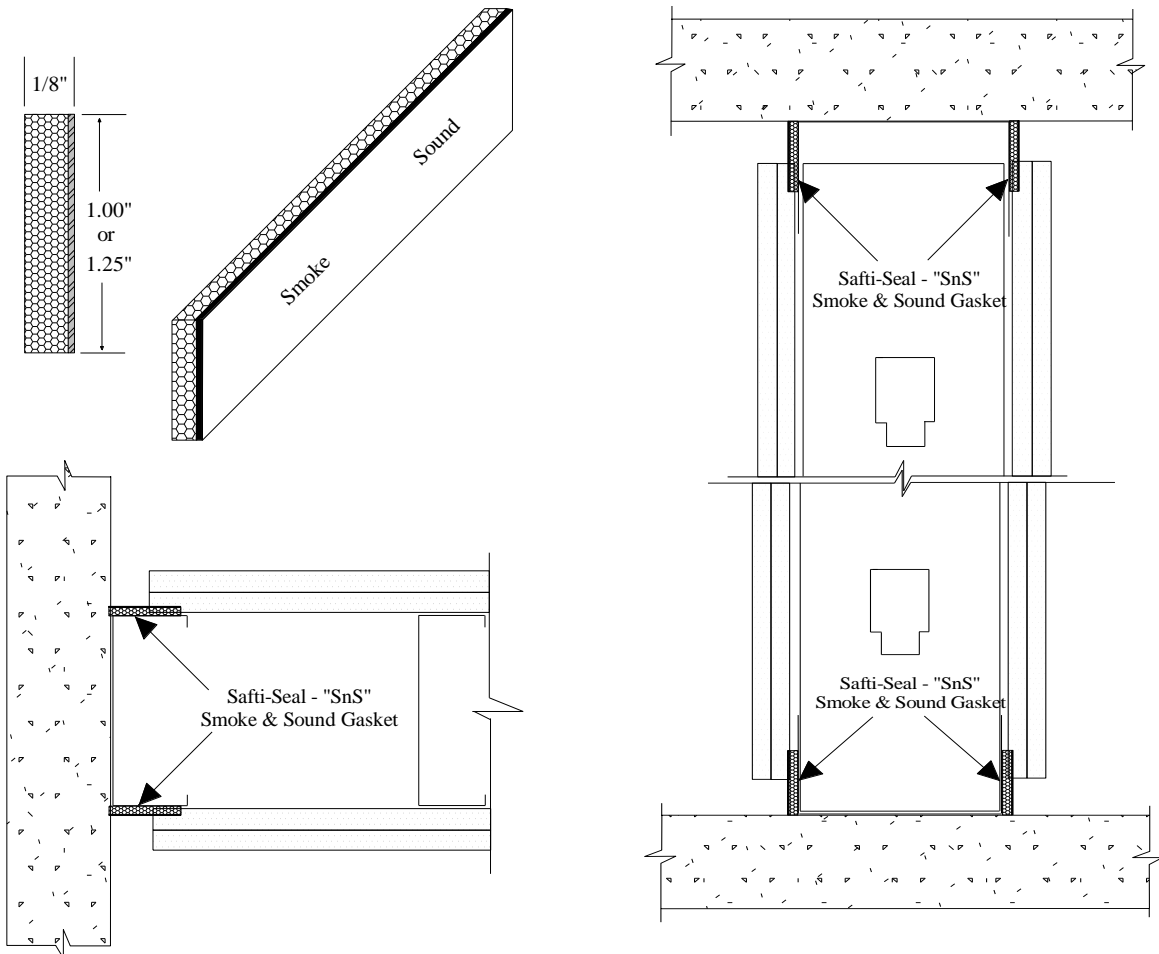

Product	Strip Width	Lft/Roll	Joint Width
SSG-75	1.00"	108'	.50"
SSGB-75 (Black)	1.00"	108'	.50"
SSG-100	1.25"	108'	.75"
SSGB-100 (Black)	1.25"	108'	.75"

www.saftiseal.com

Phone: (425) 869-2811 Fax (425) 869-2300