


# Product Profile Dimensions



## PS26 - “CJB” profiles for Protection of Control Joints

Composite Gasket/Control Joint Backer Profiles for use to protect Architectural design joints (optional control joint over gap) for up to 2 hr rated assemblies. Tested and certified to ASTM E-119 Standards (WFCi - Report #12033) ***compliant with IBC 715.1 (exception #9)***. Profile sections are fabricated from hot-dipped galvanized steel complying with ASTM A653 with a minimum G40 (25ga). Profiles comply with ASTM C645 and provide a metal profile to support intumescent materials located inside and spanning gap between opposing drywall edges at control joint locations.

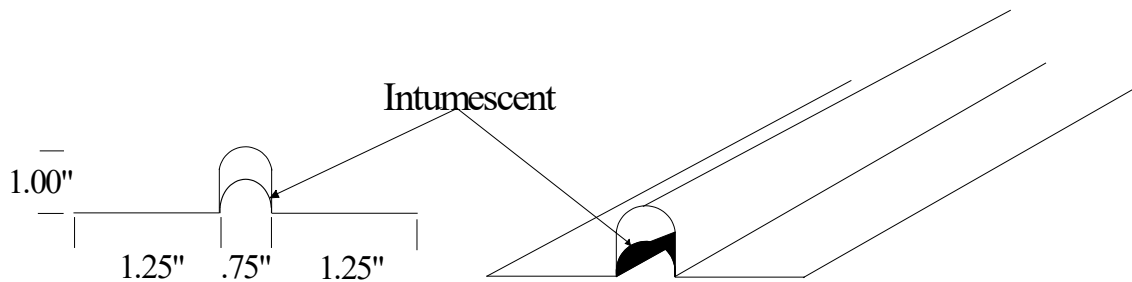

Part #	Intumescent Width	Profile Width	Gauge
CJB-18	1.25"	3.25"	.018

### UL, ASTM & Code Standards

ASTM E-119, UL263, E814  
A1003, A653, A924, C645, C754, C955  
2015 & 2018 IBC

### Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
MR 5.1 & 5.2 - Regional Proximity  
EQ 4.1 - Low Emitting Materials  
EQ 9 - Enhanced Acoustical