


Product Profile Dimensions



PS3 - “CJG” Continuation or Control Joint Gasket - Wall to Wall Joints

Composite TC3 Outer Layers over Intumescent Fire Stop with permanent “peel and stick” adhesive on outer layers for Wall to Wall Continuation and Seal/Fire Rate behind Architectural Design Joints (optional control joint over gap) for up to 2-hr rated assemblies. Tested and certified to UL 2079 v.5 Standards [WW-D-0257](#). Profile sections are certified for use located inside 1/4” gap between opposing metal or wool stud framing.

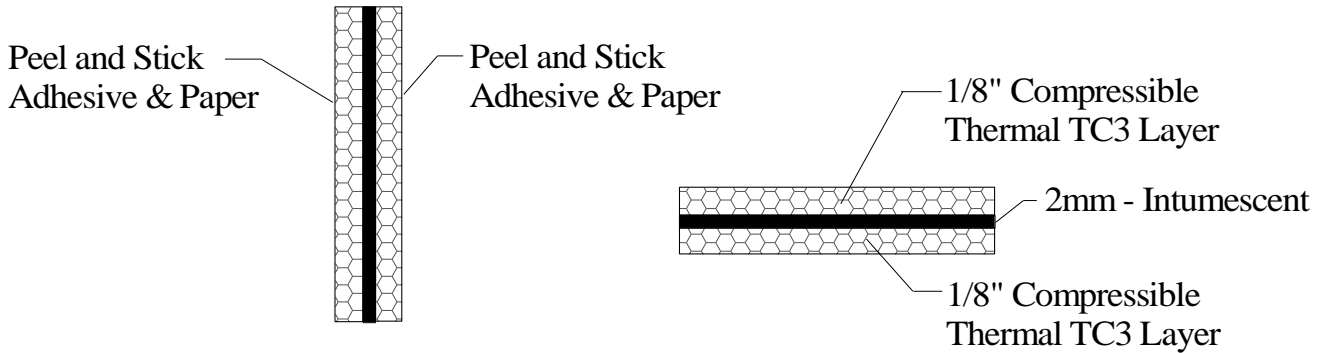

Part #	Strip Width	Strip Thickness
CJG	1.00"	3/8"

UL, ASTM & Code Standards

ASTM E-119, UL263, E814
 A1003, A653, A924, C645, C754, C955
 2015 & 2018 IBC

Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical