



Product Profile Dimensions



Sound Tested in Accordance
with ASTM E90-09

PS32 - "DJR" Double J-Runner (Shaft Wall) Profile

Composite Gasket/Framing for use in up to 2hr rated wall assemblies, up to 1 1/2" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating additional J-Retaining Flange for Liner Rip shaft side per listed assemblies in UL Fire Resistance Directory.

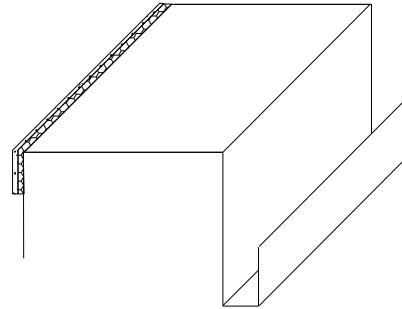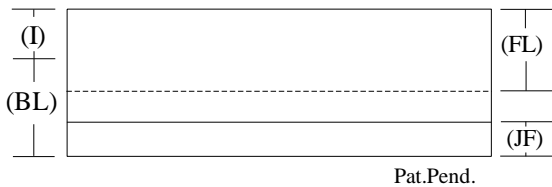

Widths (W)	Gauge
250 (2 1/2")	.030 (20)
400 (4")	.033 (20)
600 (6")	.043 (18)


Part Identification
Example: 400-DJR1-1-30

400
DJR1
- 30


/
/
/

Track Width
Profile
Gauge

DJRB - Series (Bare - No Fire Stop)

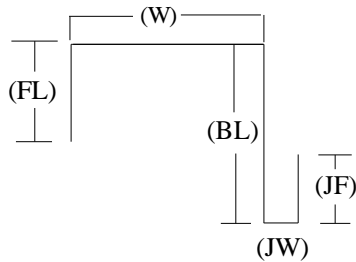

DJR1 - Series (Fire Stop "short leg")

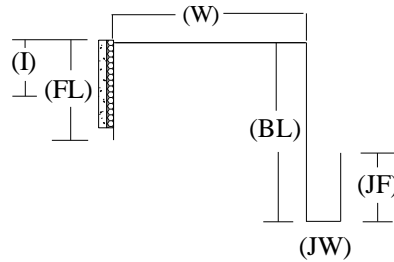

Profile	Front Leg (FL)	Back Leg (BL)	J-Width (JW)	J-Flange (JF)	Strip Width (I)	Joint Protection
DJR1	2.00"	3.00"	1.00"	1.25"	1.00"	.75"
DJRW1	2.00"	3.00"	1.00"	1.25"	1.25"	1.00"
DJRX1	2.00"	3.00"	1.00"	1.25"	1.75"	1.50"
DJRB	2.00"	3.00"	1.00"	1.25"	N/A	N/A

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
ASTM E814, E1966, E2837
A1003, A653, A924, C645, C754, C955
Sound Tested according to ASTM E90-09
2015 & 2018 IBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
MR 4.1 & 4.2 - Recycled Content: up to 2 pts
MR 5.1 & 5.2 - Regional Proximity
EQ 4.1 - Low Emitting Materials
EQ 9 - Enhanced Acoustical

Phone (425) 869-2811 Fax (425) 869-2300
U.S. Patent #10,626,598

www.saftiseal.com