


Product Profile Dimensions



Sound Tested in Accordance
with ASTM E90-09

PS35 - "FCA" Flute Cover Angle Profile

Composite Gasket/Framing for use in up to 2 hr rated wall assemblies, up to 1 1/2" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating per listed assemblies in UL Fire Resistance Directory.

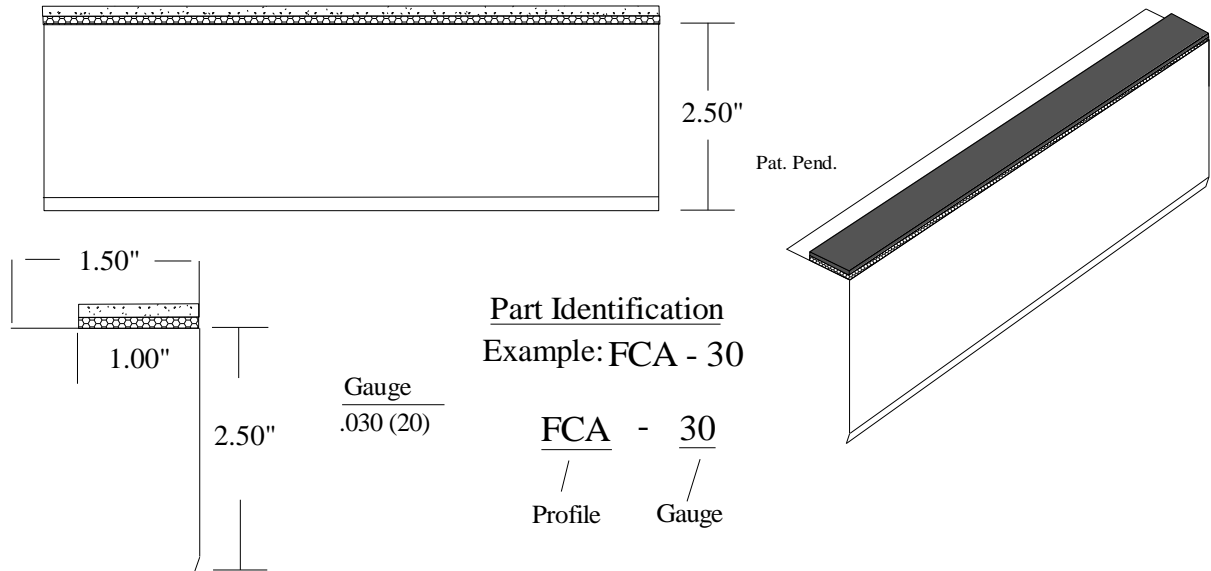

Profile	Leg Length (L)	Strip Width (I)	Flange Height (S)
FCA	1.50"	1.00"	2.50"

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
ASTM E814, E1966, E2837
A1003, A653, A924, C645, C754, C955
Sound Tested according to ASTM E90-09
2015 & 2018 IBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
MR 4.1 & 4.2 - Recycled Content: up to 2 pts
MR 5.1 & 5.2 - Regional Proximity
EQ 4.1 - Low Emitting Materials
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300
U.S. Patent #10,626,598