


Product Profile Dimensions



PS37 - "RCG" Resilient Channel Gasket – "Peel & Stick" Roll

Rated Resilient Channel Gasket with Pressure Sensitive Adhesive for "Peel and Stick" application. Seal Resilient Channel Buildup or "Chimney Gap" in both Dynamic and Static Fire, Smoke, & Sound rated conditions

- ASTM E-90 – Maintain up to STC 56
- UL 2079 v.5 – 1 Hour Fire Rating
- Temp: Storage & Application - 10 to 150 °F

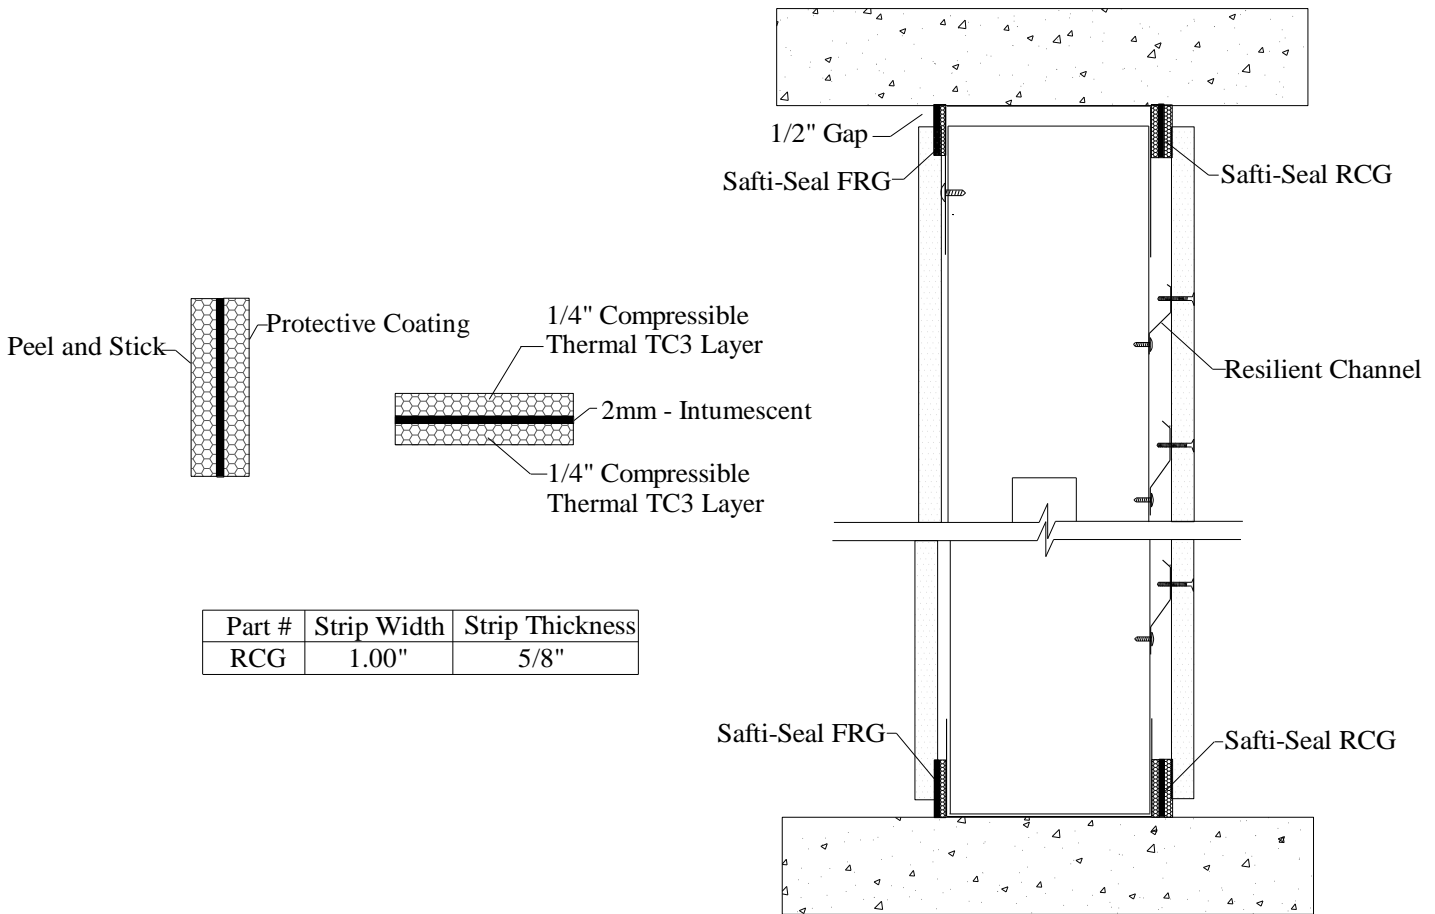

Product	Strip Width	Lft/Roll	Joint Width
RCG-75	1.00"	30'	1.00"

www.saftiseal.com

Phone: (425) 869-2811 Fax (425) 869-2300