


Product Profile Dimensions




Sound Tested in Accordance
with ASTM E90-09

PS4 – “DL” (Deep Leg) Profiles with two solid legs


Composite Gasket/Framing up to 2 hr rated assemblies. Provides 100% unencumbered and up to 2” joint protection with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating solid legs supporting “free floating” studs per listed assemblies in UL Fire Resistance Directory.

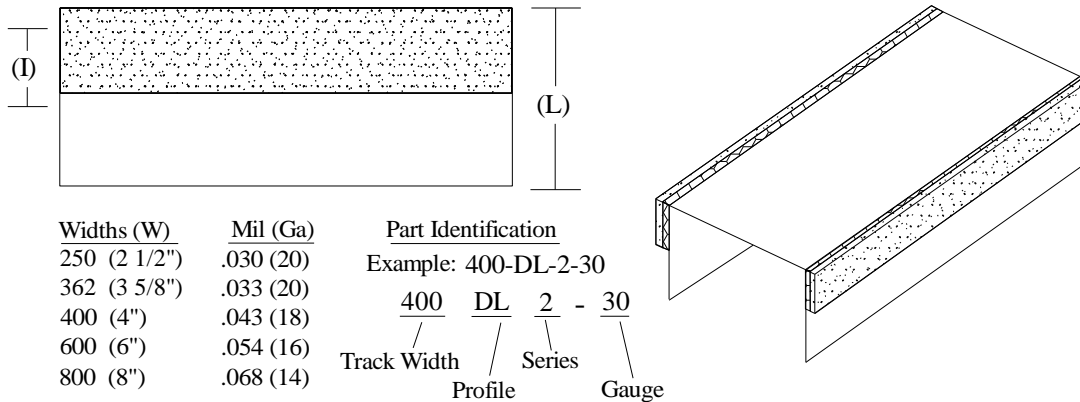

1 - Series (Fire Stop One Side)

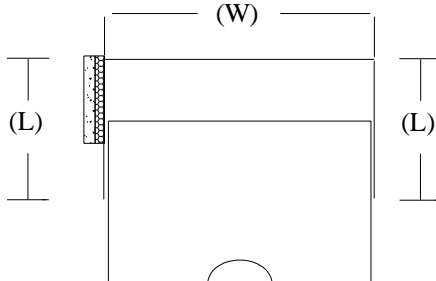

2 - Series (Fire Stop Both Sides)

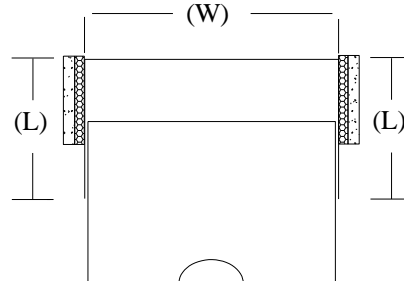

Profile	Leg Length (L)	Strip Width (I)	Slot Height (S)	Joint Protection
DL	2.00"	1.00"	N/A	.75"
DLW	2.00"	1.25"	N/A	1.00"
DLX	2.50"	1.75"	N/A	1.50"
DLZ	3.00"	2.25"	N/A	2.00"

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
ASTM E814, E1966, E2837
A1003, A653, A924, C645, C754, C955
Sound Tested according to ASTM E90-09
2015 & 2018 IBC

Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
MR 4.1 & 4.2 - Recycled Content: up to 2 pts
MR 5.1 & 5.2 - Regional Proximity
EQ 4.1 - Low Emitting Materials
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300
U.S. patent #10,626,598