


# Product Profile Dimensions





Sound Tested in Accordance  
with ASTM E90-09

## PS9 - "OJR" (Offset J-Runner) with one 2" and one 3" solid legs

Composite Gasket/Framing with "offset step" accommodates fireproofing in shaft assemblies. Provides 100% unencumbered joint protection accommodating up to 1 1/2" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating with one 2" and one 3" solid lower legs per listed assemblies in UL Fire Resistance Directory.

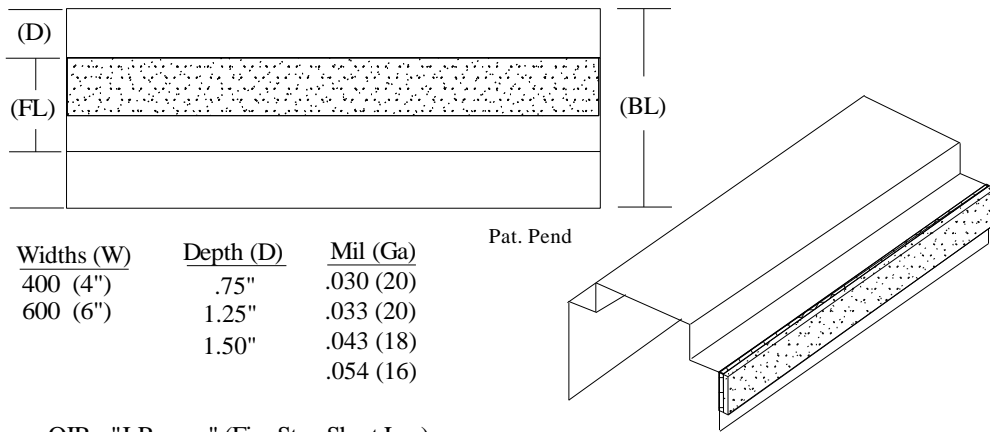

### OJR - "J-Runner" (Fire Stop Short Leg)

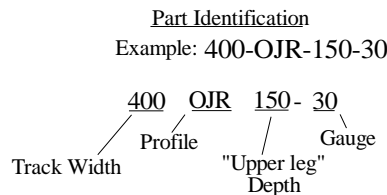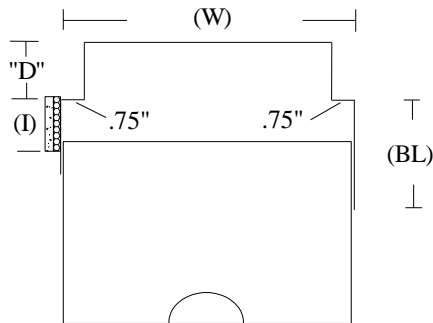

Profile	Front Leg (FL)	Back Leg (BL)	Strip Width (I)	Joint Protection
OJR	2.00"	3.00"	1.00"	.75"
OJRW	2.00"	3.00"	1.25"	1.00"
OJRX	2.00"	3.00"	1.75"	1.50"

### UL, ASTM & Code Standards

UL2079 (5<sup>th</sup> Edition) & CAN/ULC S115  
ASTM E814, E1966, E2837  
A1003, A653, A924, C645, C754, C955  
Sound Tested according to ASTM E90-09  
2015 & 2018 IBC

### Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
MR 5.1 & 5.2 - Regional Proximity  
EQ 4.1 - Low Emitting Materials  
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300  
U.S. Patent #10,626,598