

Flat Concrete Substrate




Sound Tested in Accordance
with ASTM E90-09

PT4 - Stair Shaft Concrete

Fire Rated Gasket (FRG) - UL Listing: [HW-D-0893](#) – STC 55
Smoke-n-Sound Gasket (SSG) – WEAL Report: [TL17-288](#) – STC 55

| Fire Rated | Smoke-n-Sound | Strip Width | Max. Joint Protection |
|------------|---------------|-------------|-----------------------|
| FRG-75 | SSG-75 | 1.00" | .75" |
| FRG-100 | SSG-100 | 1.25" | 1.00" |
| FRG-150 | | 1.75" | 1.50" |
| FRG-200 | | 2.25" | 2.00" |

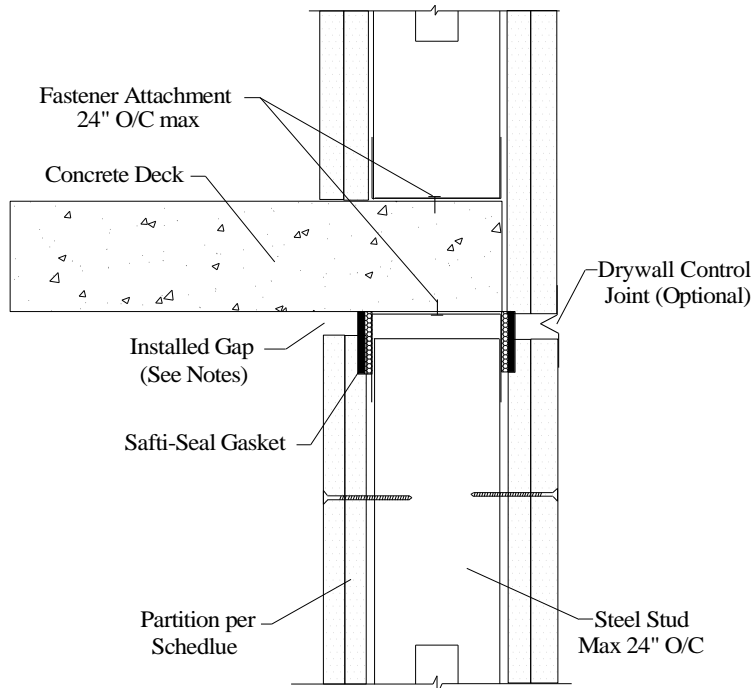

1. Installed Gap - Single Story (compression only) = **Deflection Joint Protection**
2. Installed Gap - Multi-Story (compress + extension) = **1/2 distance** of **Deflection Joint Protection**
3. Attach to substrate with approved fastener max 24" O.C or per E.O.R.
4. Do not screw drywall or stud from lower level to Header Track profile
5. Fire Rated (FRG) install and overlap per UL listed assembly or Safti-Seal install guide

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
ASTM E814, E1966, E2837
A1003, A653, A924, C645, C754, C955
Sound Tested according to ASTM E90-09
2012 & 2015 IBC

Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
MR 4.1 & 4.2 - Recycled Content: up to 2 pts
MR 5.1 & 5.2 - Regional Proximity
EQ 4.1 - Low Emitting Materials
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300
U.S. Patent #10,626,598

www.saftiseal.com