

Flat Concrete Substrate




Sound Tested in Accordance
with ASTM E90-09

PT8 - "Bare Slotted" with Caulks

Approved Caulk/Spray Materials - UL Listing: [HW-D-0632](#)
Smoke-n-Sound Caulks/Sprays – *STC 54*

Deflection Joint Protection - Framing Profile Series refer to UL Listing:

.50" - (ST) 1.00" - (STW) 1.50" - (STX)

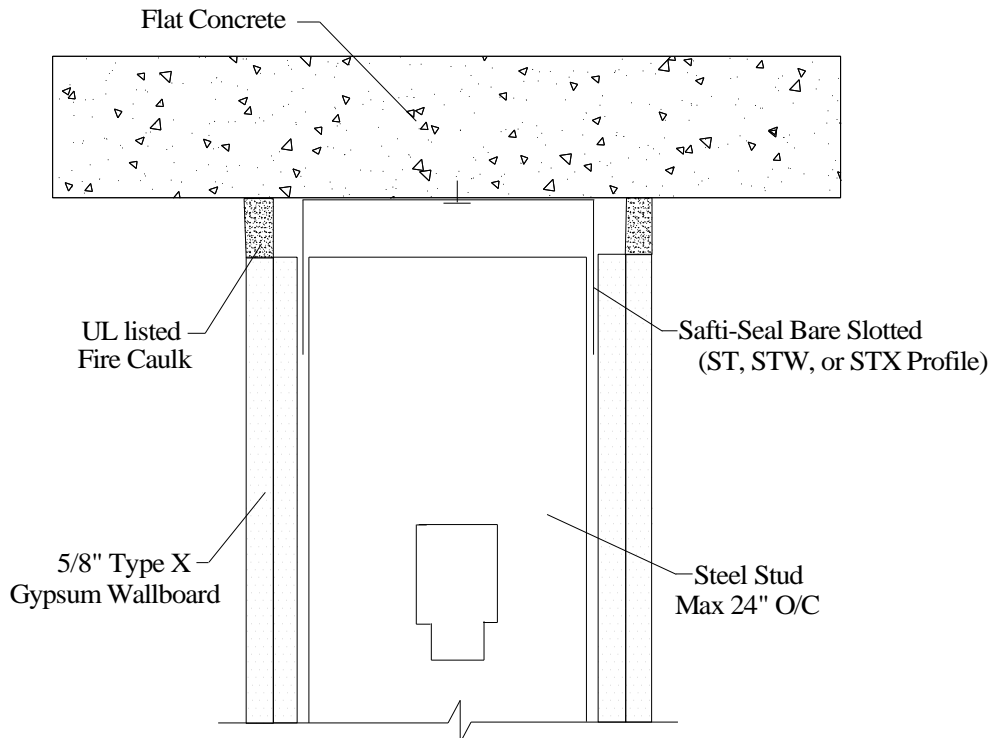

1. Max Installed Gap = 1"
2. Movement Capability = 25% of applied caulk material
3. Attach to substrate with approved fastener max 24" O.C or per E.O.R.
4. "Slotted" profile fasten metal framing fastener in center of slot (min. one side)
5. Drywall fasteners 1" to 4" below Track Profile to accommodate movement

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
ASTM E814, E1966, E2837
A1003, A653, A924, C645, C754, C955
Sound Tested according to ASTM E90-09
2012 & 2015 IBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
MR 4.1 & 4.2 - Recycled Content: up to 2 pts
MR 5.1 & 5.2 - Regional Proximity
EQ 4.1 - Low Emitting Materials
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300