


# Structural Support “Beams”



## SS16 – Coated Beam Shaft Wall DJR Profile with Liner Rip

Fire Rated Gasket (FRG) - UL Listing: [HW-D-0893](#) – STC 55  
 Smoke-n-Sound Gasket (SSG) – WEAL Report: [TL17-288](#) – STC 54

Fire Rated	Smoke-n-Sound	Strip Width	Max. Joint Protection
FRG-75	SSG-75	1.00"	.75"
FRG-100	SSG-100	1.25"	1.00"
FRG-150		1.75"	1.50"
FRG-200		2.25"	2.00"

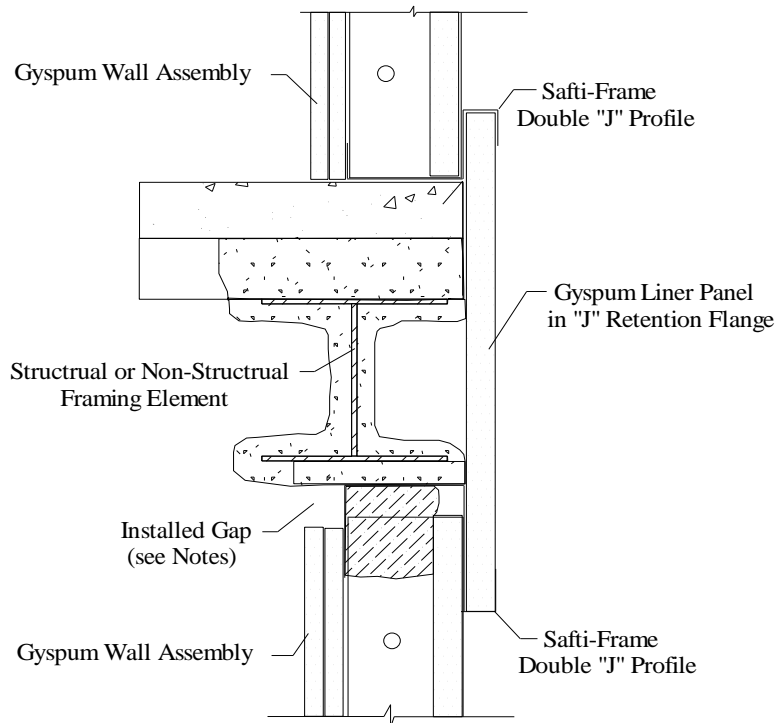

1. Installed Gap (compress + extension) = ½ movement capability (MC) of profile
2. Attach to substrate with approved fastener max 24" O/C or per E.O.R.
3. Do not screw drywall or stud or DJR profile studs "free float"
4. Fire Rated (FRG) install and overlap per UL listed assembly or Safti-Seal install guide

### UL, ASTM & Code Standards

UL2079 (5<sup>th</sup> Edition) & CAN/ULC S115  
 ASTM E814, E1966, E2837  
 A1003, A653, A924, C645, C754, C955  
 Sound Tested according to ASTM E90-09  
 2012 & 2015 IBC

### Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
 MR 5.1 & 5.2 - Regional Proximity  
 EQ 4.1 - Low Emitting Materials  
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300  
 U.S. Patent 10,626,598

[www.saftiseal.com](http://www.saftiseal.com)