


Unprotected “Bare” Fluted Substrate



UD12 - Centered Under Flute - Strap/Mineral Wool

Fire Rated Gasket (FRG) - UL Listing: [HW-D-0896](#) – *STC 55*
 Smoke-n-Sound Gasket (SSG) – WEAL Report: [TL17-288](#) – *STC 54*

Fire Rated	Smoke-n-Sound	Strip Width	Max. Joint Protection
FRG-75	SSG-75	1.00”	.75”
FRG-100	SSG-100	1.25”	1.00”
FRG-150		1.75”	1.50”
FRG-200		2.25”	2.00”

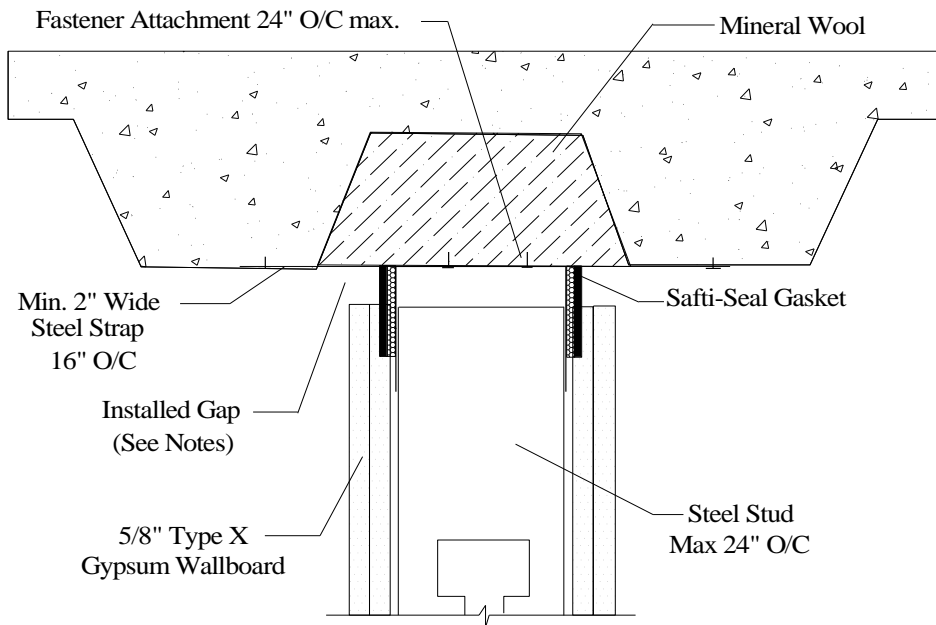

1. Installed Gap - Single Story (compression only) = **Deflection Joint Protection**
2. Installed Gap - Multi-Story (compress + extension) = **1/2 distance** of **Deflection Joint Protection**
3. Attach to substrate with approved fastener max 24” O.C or per E.O.R.
4. Do not screw drywall or stud to SaftiFrame solid leg profile studs "free float"
5. “Slotted” profile metal framing fastener installed center of slot (min. one side)
6. Drywall fasteners 1” to 2” below SaftiFrame and at bottom of obstruction to accommodate movement

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
 ASTM E814, E1966, E2837
 A1003, A653, A924, C645, C754, C955
 Sound Tested according to ASTM E90-09
 2012 & 2015 IBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300
 U.S. Patent 10,626,598