

# Vertical & Miscellaneous




Sound Tested in Accordance  
with ASTM E90-09

## VM3 - Wall to Wall Gypsum to Protected Steel "I-Beam"

Fire Rated Gasket (FRG) - UL Listing: [HW-D-0901](#) – STC 55  
Smoke-n-Sound Gasket (SSG) – WEAL Report: [TL17-288](#) – STC 54

Fire Rated	Smoke-n-Sound	Strip Width	Max. Joint Protection
FRG-75	SSG-75	1.00"	.75"
FRG-100	SSG-100	1.25"	1.00"

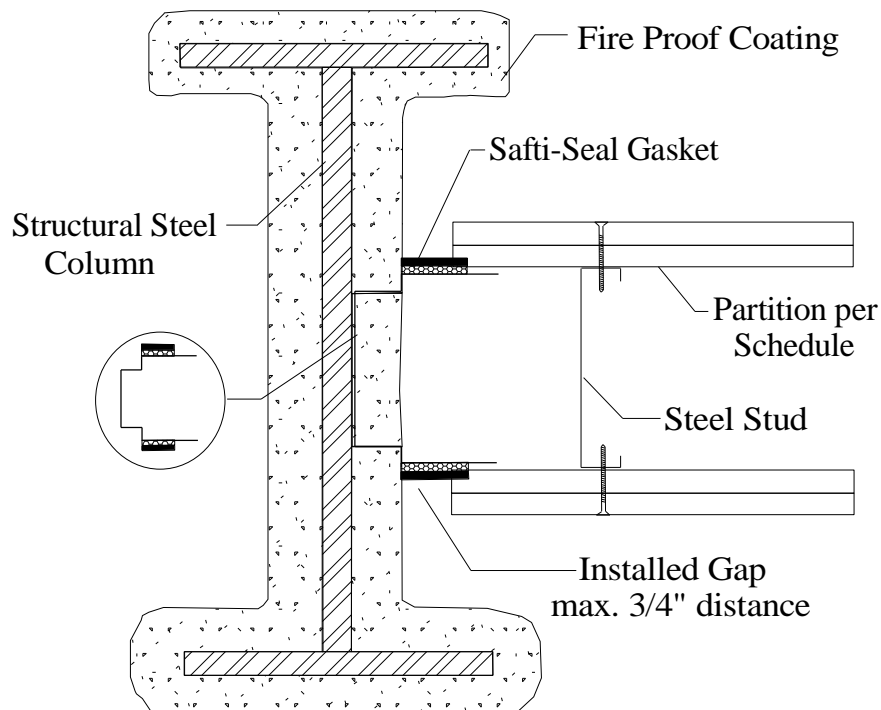

1. Installed Gap = joint protection (JP) of profile
2. Attach to substrate with approved fastener max 24" O/C or per E.O.R.
3. Fire Rated (FRG) install and overlap per UL listed assembly or Safti-Seal install guide
4. Sound Gasket (SSG) install per WEAL test report

### UL, ASTM & Code Standards

UL2079 (5<sup>th</sup> Edition) & CAN/ULC S115  
ASTM E814, E1966, E2837  
A1003, A653, A924, C645, C754, C955  
Sound Tested according to ASTM E90-09  
2012 & 2015 IBC

### Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
MR 5.1 & 5.2 - Regional Proximity  
EQ 4.1 - Low Emitting Materials  
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300  
U.S. Patent 10,626,598