

Vertical & Miscellaneous




Sound Tested in Accordance
with ASTM E90-09

VM6 - Under UL G500 Series Designs

Fire Rated Gasket (FRG) - UL Listing: [WW-S-0891](#) – *STC 55*
Smoke-n-Sound Gasket (SSG) – WEAL Report: [TL17-288](#) – *STC 54*

Fire Rated	Smoke-n-Sound	Strip Width	Max. Joint Protection
FRG-75	SSG-75	1.00"	.75"
FRG-100	SSG-100	1.25"	1.00"
FRG-150		1.75"	1.50"
FRG-200		2.25"	2.00"

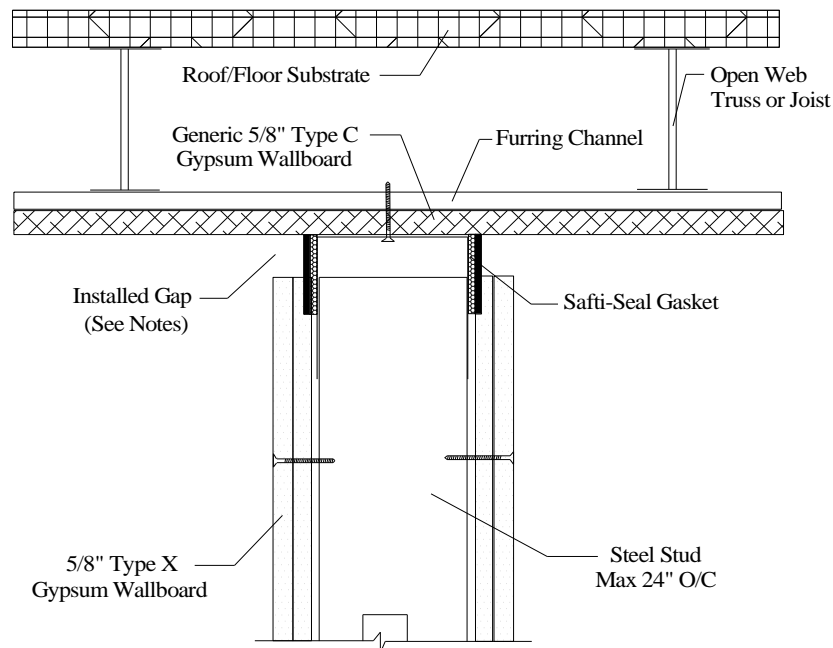

1. Installed Gap - Single Story (compression only) = **Deflection Joint Protection**
2. Installed Gap - Multi-Story (compress + extension) = **1/2 distance** of **Deflection Joint Protection**
3. Attach to substrate with approved fastener max 24" O.C or per E.O.R.
4. Do not screw drywall or stud to Safti-Frame solid leg profile studs "free float"
5. Fire Rated (FRG) install and overlap per UL listed assembly or Safti-Seal install guide
6. Sound Gasket (SSG) install per WEAL test report

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
ASTM E814, E1966, E2837
A1003, A653, A924, C645, C754, C955
Sound Tested according to ASTM E90-09
2012 & 2015 IBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
MR 4.1 & 4.2 - Recycled Content: up to 2 pts
MR 5.1 & 5.2 - Regional Proximity
EQ 4.1 - Low Emitting Materials
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300
U.S. Patent #10,626,598

www.saftiseal.com