

Vertical & Miscellaneous



Sound Tested in Accordance
with ASTM E90-09


VM8 – Safti-Butt-Strip (SBS) Rated Cosmetic Control Joint

UL listed Assembly: [WW-D-0257](#)

Fire Rated joint protection up to 2 hour (Zinc or Vinyl 093 optional)

Metal or Wood Stud Framing with 15% Movement Capability

Lowest Leakage Rating Less than 1/CFM/ft

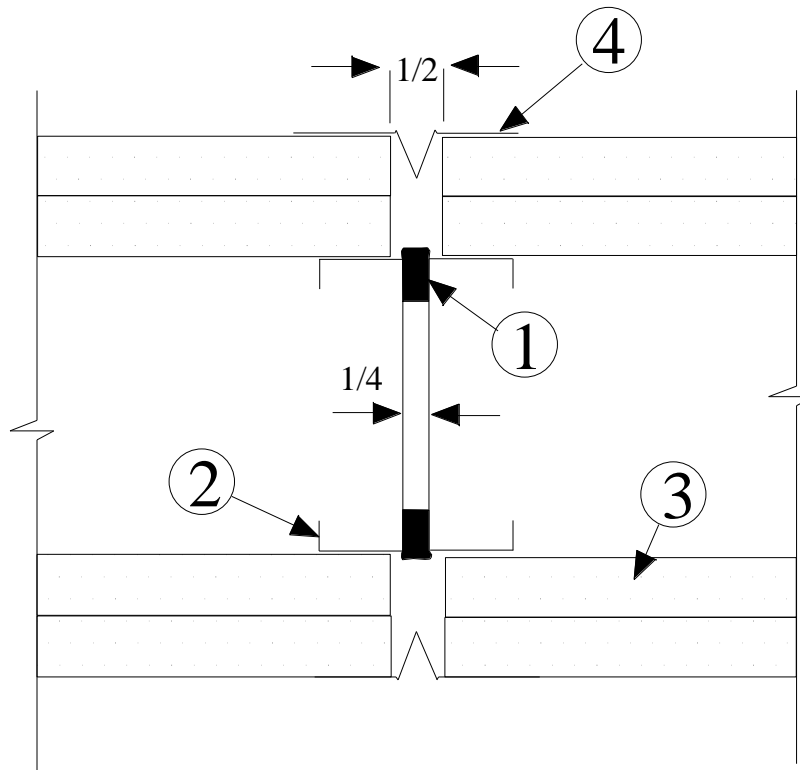

1. SBS – Safti Butt Strip Profile between framing members
2. Steel or Wood Stud Profiles
3. Gypsum 5/8” layers for 1 Hr (1 Layer) or 2 Hr (2layers) Rating
4. Zinc or Vinyl 093 Control Joint Stapled on 8” O/C with 1/2” Staples

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
ASTM E814, E1966, E2837
2015 & 2018 IBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
MR 4.1 & 4.2 - Recycled Content: up to 2 pts
MR 5.1 & 5.2 - Regional Proximity
EQ 4.1 - Low Emitting Materials
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300
10,626,598