



STC Rated (ASTM E90-09)

Safti-Seal "SCAB" (Slotted Continuous Angle Backing)


Required Backing Repair for Fire, Smoke, & Sound Seal **before**, MEP, Stud, & Drywall Install

Slotted 20ga Angle Provides Continuous Flange Support & Fastener Location/Start

"Scab Profile" & Safti-Strip Install Sequenced - **No Overlap Trade Safety & Congestion Issues**



Improved "Track Install" Production – Square Chop Saw Cuts at Vertical Obstructions

Eliminate Hazardous & Labor Intense **Grinding of Webs** & **Manual Snipping** of Flanges

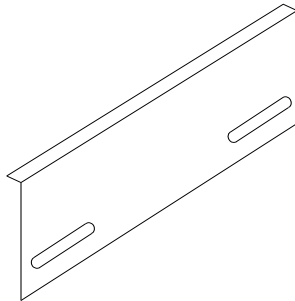


Profile	Length
SCAB 800	8.00"
SCAB 1200	12.00"
SCAB 1600	16.00"

Gap in Backing Support of Joint Material

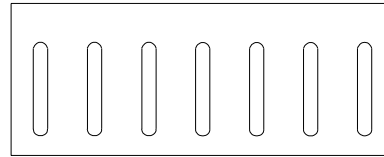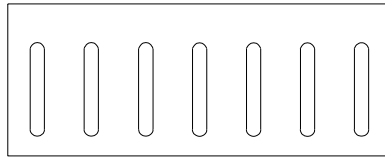

Install SCAB Repair

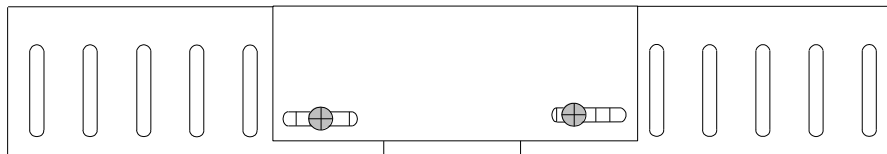

Peel and Stick Safti-Strip Joint Seal (Continuous)

