



Product Profile Dimensions

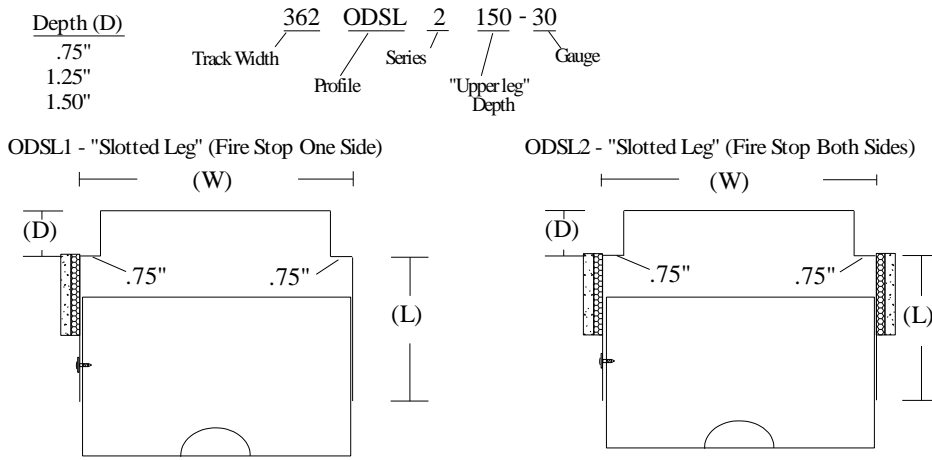

PS11 – SaftiFrame “ODSL” (Offset Slotted Leg) Profiles with two offset slotted lower legs

Composite Safti-Strip/Framing with “offset step” accommodates fireproofing in rated assemblies. Provides 100% unencumbered joint protection accommodating up to 1 1/2” overall movement with level III (seismic) UL certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating two legs with slots spaced 1” O/C for permanent attachment of studs per UL listed assemblies.

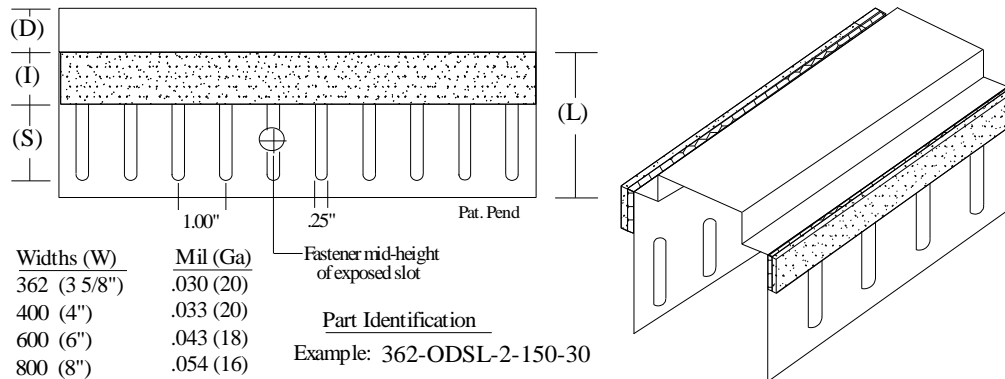

Profile	Lower Leg Length (L)	Strip Width (I)	Slot Height (S)	Joint Protection
ODSL	3.00"	1.00"	1.50"	.75"
ODSLW	3.00"	1.25"	1.50"	1.00"
ODSLX	4.00"	1.75"	2.00"	1.50"

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
 ASTM E814, E1966, E2837
 A1003, A653, A924, C645, C754, C955
 Sound Tested according to ASTM E90-09
 2015 & 2018 IBC

Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300