


# Product Profile Dimensions




## PS12 - SaftiFrame "OJR" (Offset J-Runner) with one 2" and one 3" solid legs

Composite Safti-Strip/Framing with "offset step" accommodates fireproofing in shaft assemblies. Provides 100% unencumbered joint protection accommodating up to 1 1/2" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating with one 2" and one 3" solid lower legs per listed assemblies in UL Fire Resistance Directory.

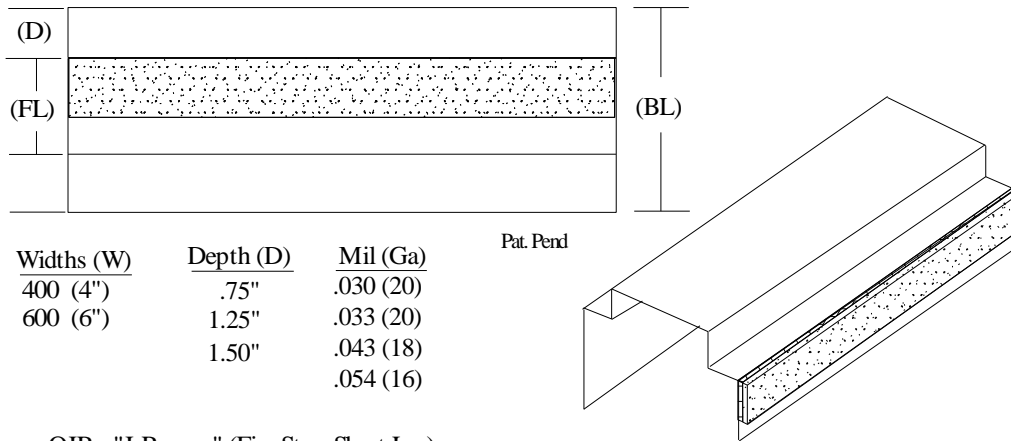

### OJR - "J-Runner" (Fire Stop Short Leg)

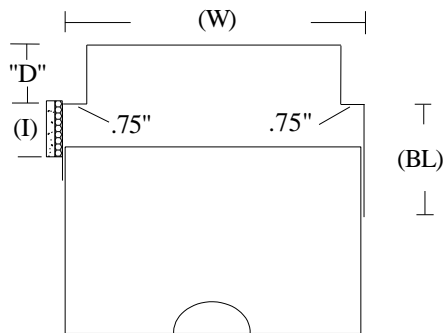

Part Identification  
 Example: 400-OJR-150-30

400 OJR 150-30  
 Track Width Profile "Upper leg" Depth Gauge

Profile	Front Leg (FL)	Back Leg (BL)	Strip Width (I)	Joint Protection
OJR	2.00"	3.00"	1.00"	.75"
OJRW	2.00"	3.00"	1.25"	1.00"
OJRX	2.00"	3.00"	1.75"	1.50"

### UL, ASTM & Code Standards

UL2079 (5<sup>th</sup> Edition) & CAN/ULC S115  
 ASTM E814, E1966, E2837  
 A1003, A653, A924, C645, C754, C955  
 Sound Tested according to ASTM E90-09  
 2015 & 2018 IBC

### Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
 MR 5.1 & 5.2 - Regional Proximity  
 EQ 4.1 - Low Emitting Materials  
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300

[www.saftiseal.com](http://www.saftiseal.com)