


Product Profile Dimensions



STC Rated (ASTM E90-09)

PS17 – SaftiFrame “OSA” (Outside Angle) 2”solid horizontal & slotted/vertical leg

Composite Safti-Strip/Framing for use in up to 2hr rated wall assemblies, up to 1 ½” overall movement level III (seismic) based on UL certification of similar profiles. Minimum G40 (20ga) and G60 (18ga and heavier) coating with Safti-Strip towards finished sides of wall provide protection 1 ½” or 2” slots 1” O/C.

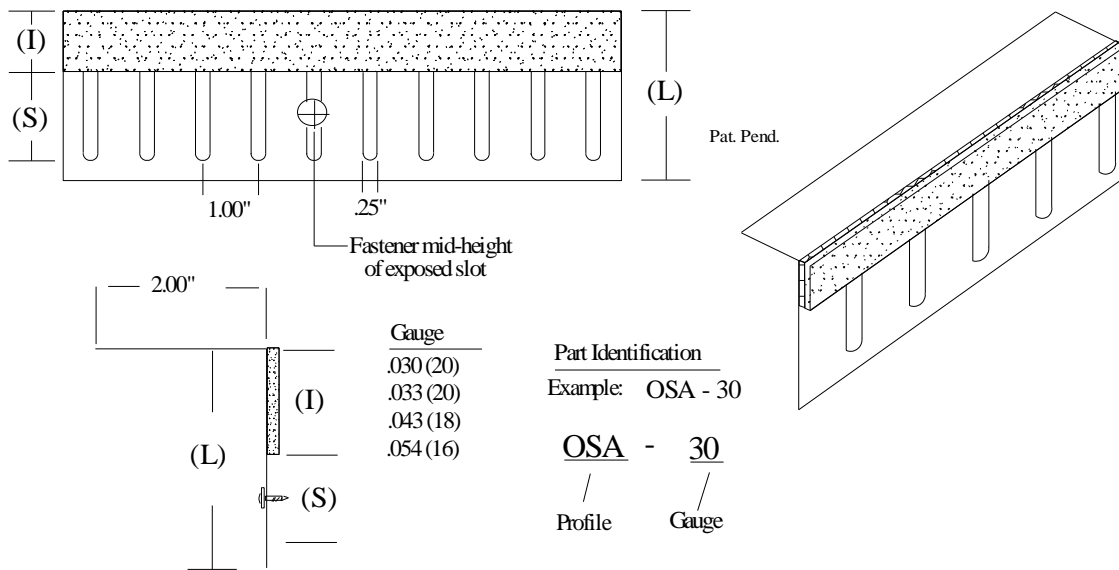

Profile	Leg Length (L)	Strip Width (I)	Slot Height (S)	Joint Protection
OSA	3.00"	1.00"	1.50"	.75"
OSAW	3.00"	1.25"	1.50"	1.00"
OSAX	4.00"	1.75"	2.00"	1.50"

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
 ASTM E814, E1966, E2837
 A1003, A653, A924, C645, C754, C955
 Sound Tested according to ASTM E90-09
 2015 & 2018 IBC

Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300

www.saftiseal.com