


Product Profile Dimensions



PS30 – SaftiFrame “OAN” (Outside Angle) horizontal and vertical solid legs

Composite Safti-Strip/Framing for use in up to 2 hr rated wall assemblies. Provides 100% unencumbered joint protection accommodating up to 2” overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating. Opposing profiles located with Safti-Strip towards finished sides of wall provide protection of joints.

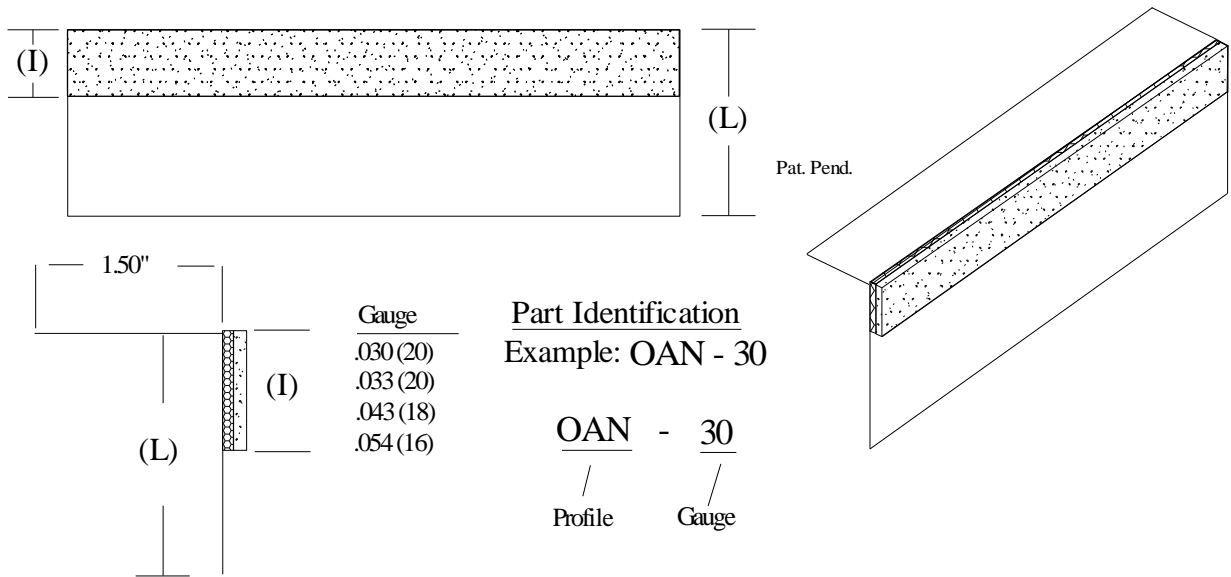

Profile	Leg Length (L)	Strip Width (I)	Slot Height (S)	Joint Protection
OAN	1.50"	1.00"	N/A	.75"
OANW	1.50"	1.25"	N/A	1.00"
OANX	2.50"	1.75"	N/A	1.50"
OANZ	3.00"	2.25"	N/A	2.00"

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
 ASTM E814, E1966, E2837
 A1003, A653, A924, C645, C754, C955
 Sound Tested according to ASTM E90-09
 2015 & 2018 IBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300