

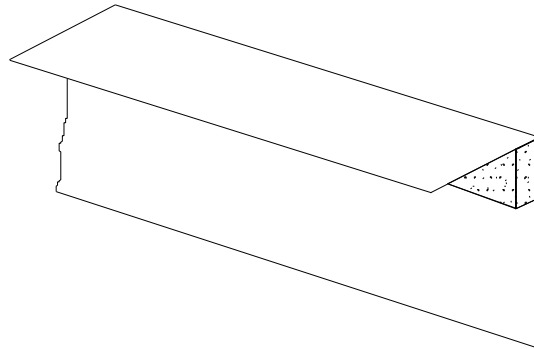


# Product Profile Dimensions



## PS40 – SaftiFrame “IANF” (Inside Angle Flush) solid vertical and horizontal legs

Composite Safti-Strip/Framing for use in up to 3 hr rated wall assemblies. Provides 100% unencumbered joint protection accommodates up to 3” overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating based on listed assemblies in UL Fire Resistance Directory.

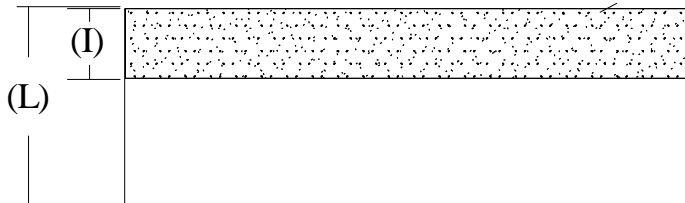

Profile	Leg Length	Strip Width	Joint Protection
	(L)	(I)	
IANFW	2.50"	1.25"	1.00"
IANFX	3.00"	1.75"	1.50"
IANFZ	4.00"	2.25"	2.00"

### UL, ASTM & Code Standards

UL2079 (5<sup>th</sup> Edition) & CAN/ULC S115  
 ASTM E814, E1966, E2837  
 A1003, A653, A924, C645, C754, C955  
 Sound Tested according to ASTM E90-09  
 2015 & 2018 IBC

### Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
 MR 5.1 & 5.2 - Regional Proximity  
 EQ 4.1 - Low Emitting Materials  
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300