


Product Profile Dimensions



PS45 - “SBS” Safti-Butt-Strip Wall to Wall Rated Joints

Composite TC3 Outer Layers over Intumescent Fire Stop with permanent “peel and stick” adhesive on outer layers for use to protect Wall to Wall Joints and rated to allow for Architectural design joints (optional control joint over gap) for up to 2 hr rated assemblies. Tested and certified to UL 2079 v.5 Standards WW-D-0214. Profile sections are certified for use when located inside 1/4” gap between opposing metal or wool stud framing.

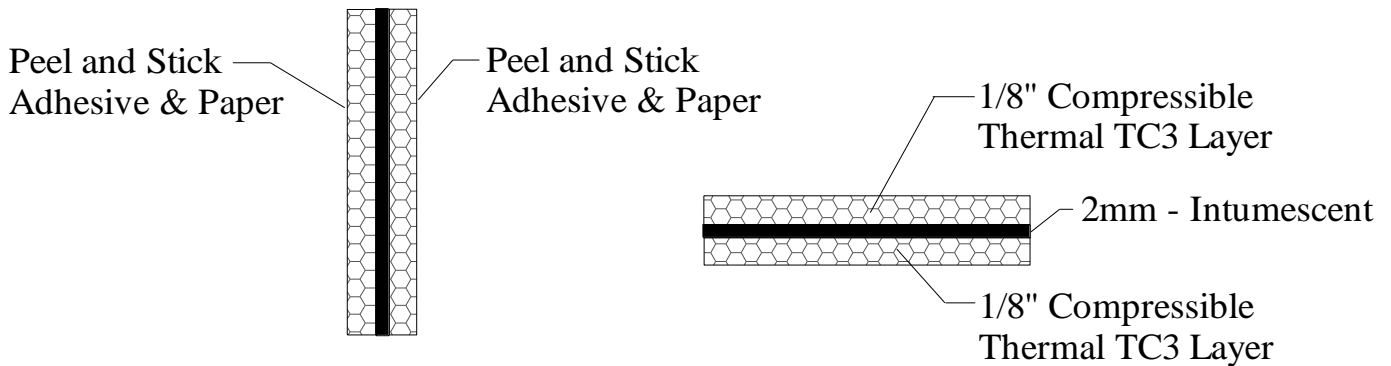

Part #	Strip Width	Strip Thickness
SBS	1.00"	3/8"

UL, ASTM & Code Standards

ASTM E-119, UL263, E814
A1003, A653, A924, C645, C754, C955
2015 & 2018 IBC

Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
MR 4.1 & 4.2 - Recycled Content: up to 2 pts
MR 5.1 & 5.2 - Regional Proximity
EQ 4.1 - Low Emitting Materials
EQ 9 - Enhanced Acoustical