



# Product Profile Dimensions

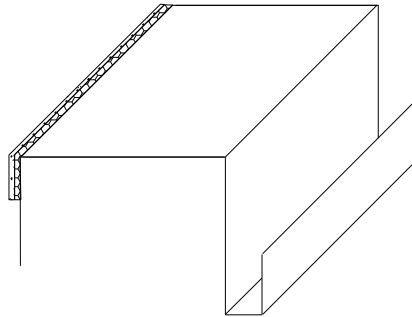

## PS61 - "DJR" Double J-Runner (Shaft Wall) Profile

Composite Safti-Strip/Framing for use in up to 2hr rated wall assemblies, up to 1 1/2" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating additional J-Retaining Flange for Liner Rip shaft side per listed assemblies in UL Fire Resistance Directory.


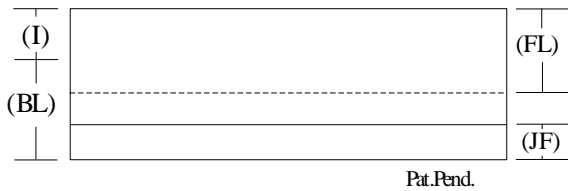


Widths (W)	Gauge
250 (2 1/2")	.030 (20)
400 (4")	.033 (20)
600 (6")	.043 (18)

**Part Identification**  
 Example: 400-DJR1-1-30  
 400      DJR1      - 30  
 Track Width   Profile      Gauge

DJRB - Series (Bare - No Fire Stop)

DJR1 - Series (Fire Stop "short leg")

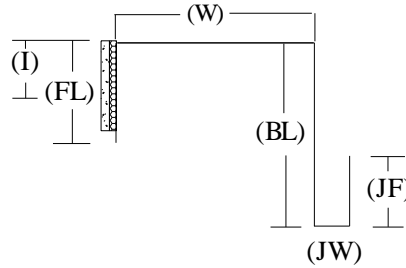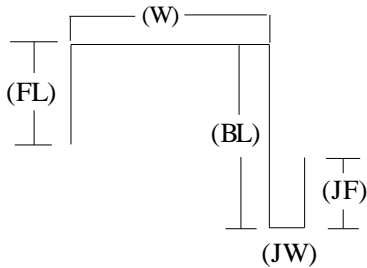

Profile	Front Leg (FL)	Back Leg (BL)	J-Width (JW)	J-Flange (JF)	Strip Width (I)	Joint Protection
DJR1	2.00"	3.00"	1.00"	1.25"	1.00"	.75"
DJRW1	2.00"	3.00"	1.00"	1.25"	1.25"	1.00"
DJRX1	2.00"	3.00"	1.00"	1.25"	1.75"	1.50"
DJRB	2.00"	3.00"	1.00"	1.25"	N/A	N/A

### UL, ASTM & Code Standards

UL2079 (5<sup>th</sup> Edition) & CAN/ULC S115  
 ASTM E814, E1966, E2837  
 A1003, A653, A924, C645, C754, C955  
 Sound Tested according to ASTM E90-09  
 2015 & 2018 IBC

### Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
 MR 5.1 & 5.2 - Regional Proximity  
 EQ 4.1 - Low Emitting Materials  
 EQ 9 - Enhanced Acoustical

Phone (425) 869-2811 Fax (425) 869-2300

[www.saftiseal.com](http://www.saftiseal.com)