


Product Profile Dimensions



PS65 - “Safti-Strip” TC3 - Expandable Composite in Roll Form

Composite Fire Stop of Expandable Layer and Thermal Barrier Material with Pressure Sensitive Adhesive (PSA) applied to one side including release paper for “Peel and Stick” application. *When using field application method* see installation instructions and refer to chart below for product selection based on specified deflection/joint protection and if using alternative “slotted track” framing.

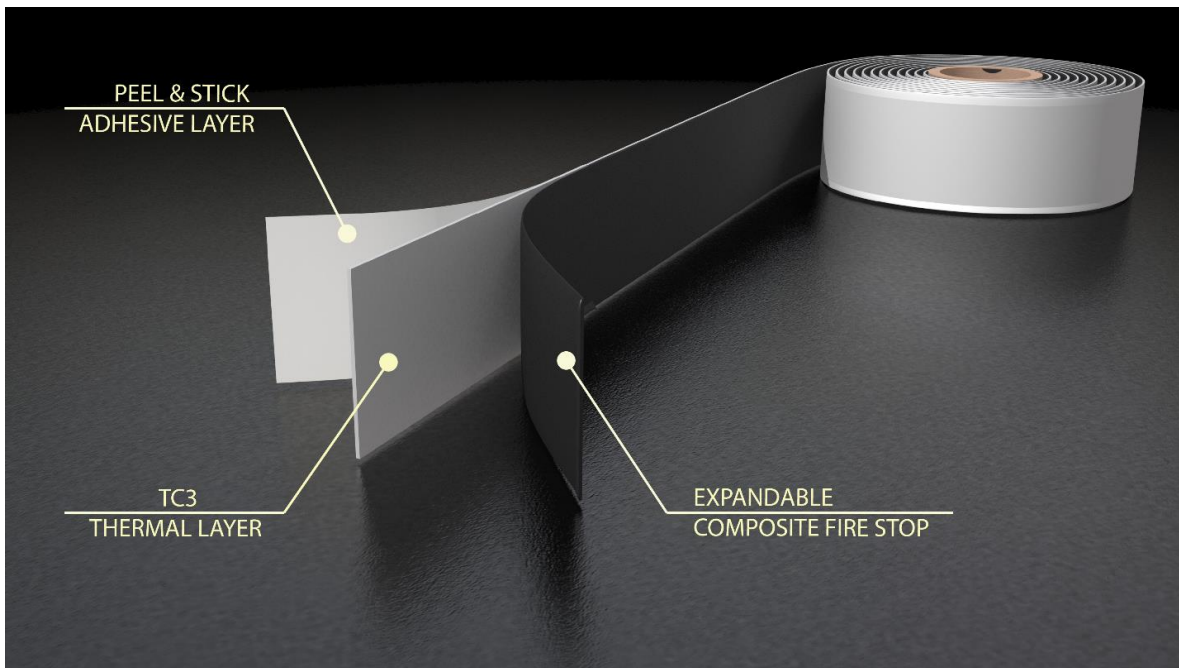

Product	Strip Width	Length	Max. Joint	Solid Profile	Slotted Profile	Slotted Profile	Slot Location
		Lft/Roll	Protection	Leg Length	Leg Length	Slot Length	Down From Web
Safti-Strip 75	1.00”	82’	.75”	2.00”	2.50”	1.50”	.50”
Safti-Strip 100	1.25”	82’	1.00”	2.00”	3.00”	1.50”	1.00”
Safti-Strip 150	1.75”	82’	1.50”	2.50”	4.00”	2.00”	1.50”
Safti-Strip 200	2.25”	82’	2.00”	3.00”	N/A	N/A	N/A

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
 ASTM E814, E1966, E2837
 A1003, A653, A924, C645, C754, C955
 Sound Tested according to ASTM E90-09
 2015 & 2018 IBC

Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300