


Product Profile Dimensions



PS66 - "FCA" Flute Cover Angle Profile

Composite Safti-Strip/Framing for use in up to 2 hr rated wall assemblies, up to 1 1/2" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating per listed assemblies in UL Fire Resistance Directory.

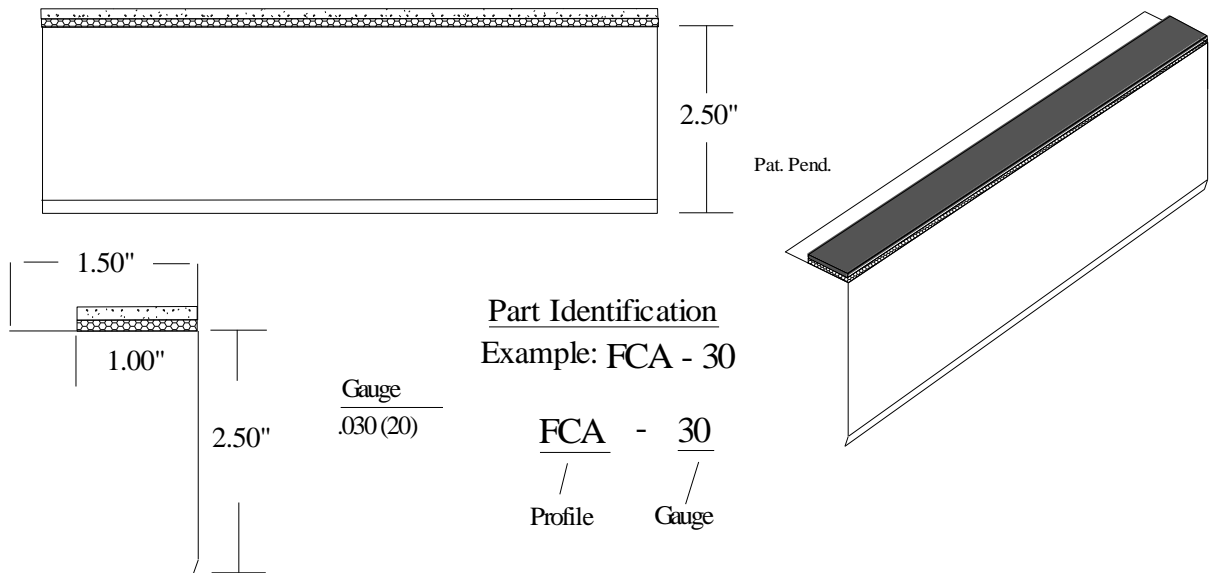

Profile	Leg Length (L)	Strip Width (I)	Flange Height (S)
FCA	1.50"	1.00"	2.50"

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
 ASTM E814, E1966, E2837
 A1003, A653, A924, C645, C754, C955
 Sound Tested according to ASTM E90-09
 2015 & 2018 IBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300