


# Flat Concrete Substrate



## PT6 – Bottom of Wall Concrete Floor

**Deflection Joint Protection** - Strip / Framing Profile Series based on UL: [BW-S-0021](#)

.75" - 100 / Stock

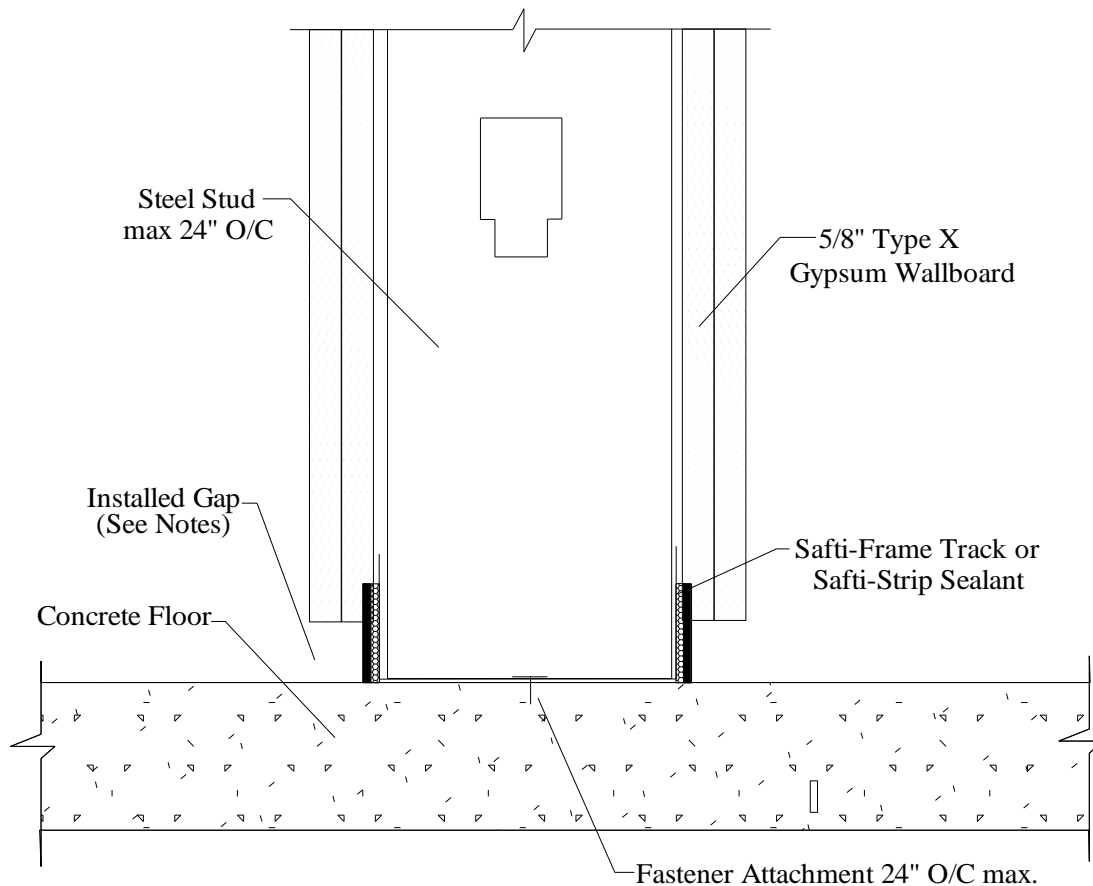

1. Installed Gap = **Deflection Joint Protection**
2. Attach to substrate with approved fastener max 24" O.C or per E.O.R
3. Drywall or stud fastened to SaftiFrame per U400 or V400 certified wall designs

### UL, ASTM & Code Standards

UL2079 (5<sup>th</sup> Edition) & CAN/ULC S115  
ASTM E814, E1966, E2837  
A1003, A653, A924, C645, C754, C955  
Sound Tested according to ASTM E90-09  
2012 & 2015 IBC

### Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
MR 5.1 & 5.2 - Regional Proximity  
EQ 4.1 - Low Emitting Materials  
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300

[www.saftiseal.com](http://www.saftiseal.com)