







(Field) Peel & Stick  or **Factory Applied** 



- Permanent Dynamic Joint Protection Before MEP, Stud & Drywall
- Up to 2.00” Deflection - Unencumbered Narrowest Installed Gaps
- Single Composite Profile Rated for Both 1 & 2 Hour Assemblies
- Lifetime **Fire, Smoke, & Sound Protection - No Material Fatigue**
 - Improve “Top Track” & “Backing Repair” Production
 - “Stand Alone” **No** Additional “Post Drywall Joint Fill” Material
 - Exposed (Optional) Reveal or Rating of Cosmetic Tape/Trims

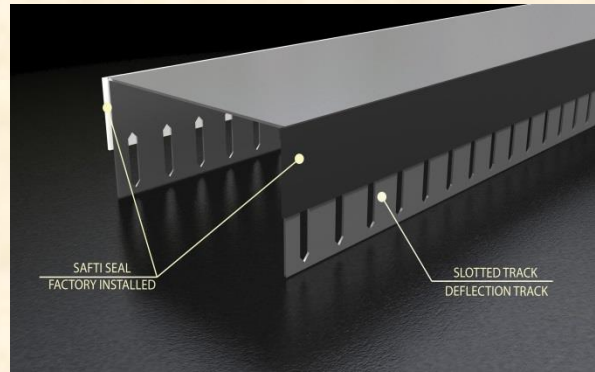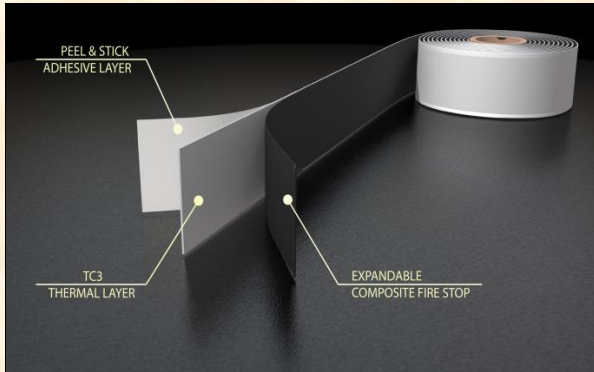



Exposed “Skim Coat” Substrate



Exposed “Raw Concrete” Substrate

