


Vertical & Miscellaneous



VM18 – Bottom of Wall

Joint Protection Capabilities (JP) / Profile Series based on UL: [BW-S-0021](#)

3/4" MC - (Stock Series)

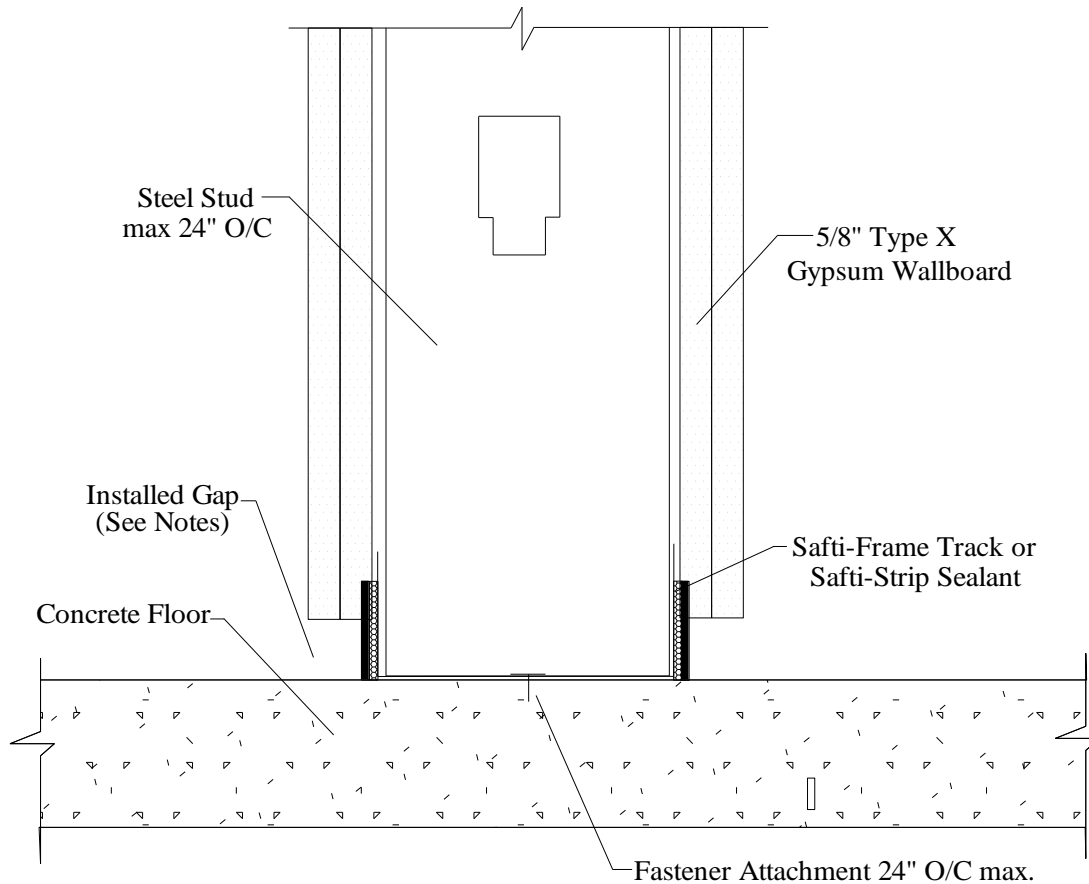

1. Installed Gap = joint protection (JP) of profile
2. Attach to substrate with approved fastener max 24" O.C or per E.O.R
3. Drywall and/or stud fastened to Safti-Frame per U400 or V400 certified wall designs

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
ASTM E814, E1966, E2837
A1003, A653, A924, C645, C754, C955
Sound Tested according to ASTM E90-09
2012 & 2015 IBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
MR 4.1 & 4.2 - Recycled Content: up to 2 pts
MR 5.1 & 5.2 - Regional Proximity
EQ 4.1 - Low Emitting Materials
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300