



Product Profile Dimensions




Sound Tested in Accordance
with ASTM E90-09

PS8 – “ODSL” (Offset Slotted Leg) Profiles with two offset slotted lower legs


Composite Gasket/Framing with “offset step” accommodates fireproofing in rated assemblies. Provides 100% unencumbered joint protection accommodating up to 1 1/2” overall movement with level III (seismic) UL certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating two legs with slots spaced 1” O/C for permanent attachment of studs per UL listed assemblies.

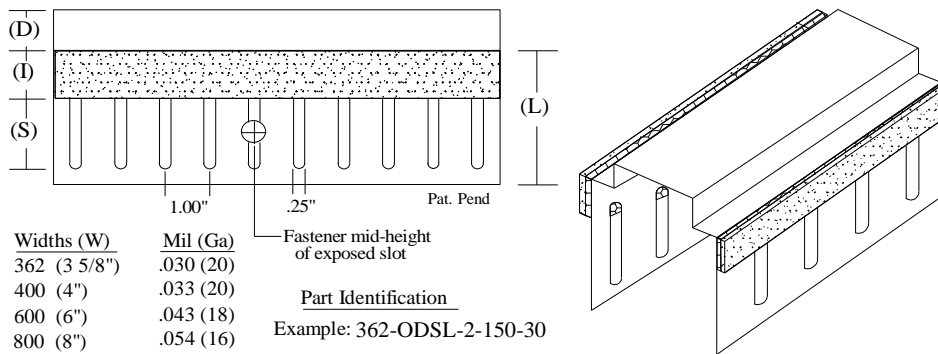

ODSL1 - "Slotted Leg" (Fire Stop One Side)

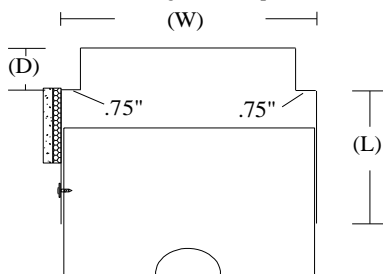

ODSL2 - "Slotted Leg" (Fire Stop Both Sides)

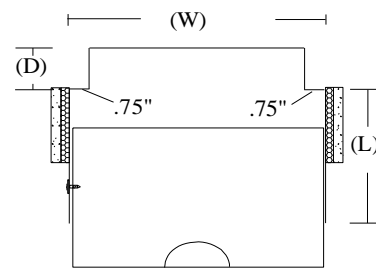

Profile	Lower Leg Length (L)	Strip Width (I)	Slot Height (S)	Joint Protection
ODSL	2.50"	1.00"	1.50"	.75"
ODSLW	3.00"	1.25"	1.50"	1.00"
ODSLX	4.00"	1.75"	2.00"	1.50"

UL, ASTM & Code Standards

UL2079 (5th Edition) & CAN/ULC S115
ASTM E814, E1966, E2837
A1003, A653, A924, C645, C754, C955
Sound Tested according to ASTM E90-09
2015 & 2018 IBC

Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
MR 4.1 & 4.2 - Recycled Content: up to 2 pts
MR 5.1 & 5.2 - Regional Proximity
EQ 4.1 - Low Emitting Materials
EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300
U.S. Patent #10,626,598